


東芝照明器具配光データシート

名 称	LED照明器具
形 名	LEDH86188PL-LD

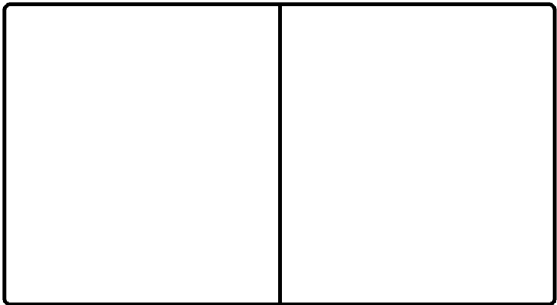

効 率	F	4 %
	F	96 %
	F	100 %
	器具 光束	5210 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前 面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備 考	
--------	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	297	297	297
10°	292	292	292
20°	279	279	279
30°	257	257	257
40°	227	227	227
50°	191	191	191
60°	148	148	148
70°	104	104	104
80°	60	60	60
90°	27	27	27
100°	15	15	15
110°	8	8	8
120°	3	3	3
130°	1	1	1
140°	1	1	1
150°	1	1	1
160°	1	1	1
170°	1	1	1
180°	1	1	1

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0	
室指数	固有照明率 (×0.01)																								
0.60	60	55	45	43	37	35	58	54	44	42	36	35	42	41	35	34	34	33	29	27					
0.80	72	65	57	53	48	46	69	63	56	53	47	45	53	51	45	44	44	43	38	36					
1.00	79	71	64	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41					
1.25	87	77	73	67	63	59	83	75	71	65	62	58	67	63	59	57	57	55	50	48					
1.50	92	81	79	71	69	64	88	79	76	70	67	63	72	67	65	61	62	60	55	52					
2.00	100	87	89	79	79	73	96	85	86	78	77	72	80	75	74	70	70	68	63	60					
2.50	105	90	95	84	86	78	101	88	91	82	84	77	86	79	79	74	75	72	68	65					
3.00	109	93	99	87	92	82	104	91	96	85	89	80	90	82	84	78	79	76	72	69					
4.00	113	96	106	91	99	87	109	94	102	90	96	86	95	87	90	83	85	81	77	74					
5.00	116	98	110	94	104	90	111	96	106	93	100	89	98	89	94	86	88	84	81	78					
10.00	123	103	119	100	115	98	117	101	114	99	111	97	106	95	103	94	96	91	88	85					

