


# 東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP81022-LC

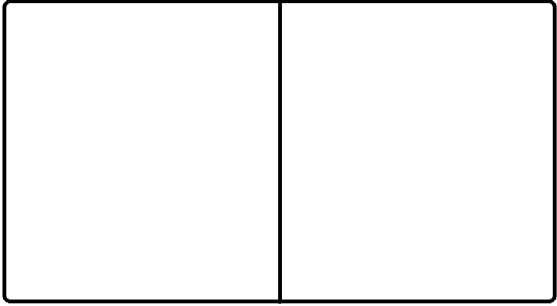

効 率	F	7 %
	F	93 %
	F	100 %
	器具光束	3450 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	309	309	309
10°	304	304	304
20°	288	288	288
30°	264	264	264
40°	231	231	231
50°	189	189	189
60°	141	141	141
70°	91	91	91
80°	48	48	48
90°	20	20	20
100°	9	9	9
110°	9	9	9
120°	10	10	10
130°	11	11	11
140°	12	12	12
150°	13	13	13
160°	12	12	12
170°	10	10	10
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	61	56	46	44	38	37	59	54	45	43	37	36	43	42	36	35	35	34	30	28
0.80	73	66	58	55	49	47	70	64	57	54	48	46	54	52	46	45	45	44	39	37
1.00	80	72	66	61	56	53	77	70	64	60	55	53	60	57	53	51	51	50	45	42
1.25	87	78	74	68	64	60	84	75	72	66	63	59	68	64	60	58	58	56	51	48
1.50	92	81	80	72	70	65	89	79	77	71	69	64	73	68	65	62	63	60	56	53
2.00	101	88	90	80	81	74	96	85	87	78	79	73	81	75	74	70	71	68	64	61
2.50	105	91	95	84	87	79	101	89	92	83	85	77	86	79	80	75	76	73	68	65
3.00	109	93	100	88	93	83	104	91	96	86	90	81	90	83	84	79	79	76	72	69
4.00	114	97	106	92	100	88	109	94	102	90	97	86	95	87	90	83	85	81	77	74
5.00	116	98	110	95	105	91	111	96	106	93	101	90	98	89	94	86	88	84	80	77
10.00	122	102	119	100	116	98	117	100	114	98	111	96	105	95	103	93	95	90	87	84

