


# 東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP81023-LC

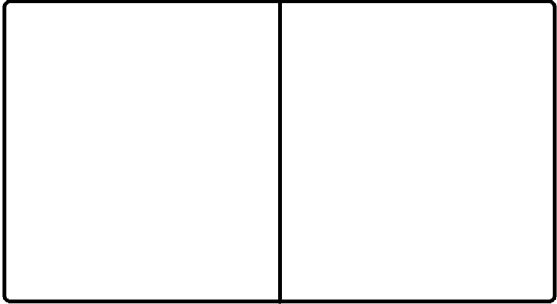

効 率	F	5 %
	F	95 %
	F	100 %
	器具光束	3750 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	334	334	334
10°	328	328	328
20°	309	309	309
30°	277	277	277
40°	237	237	237
50°	191	191	191
60°	140	140	140
70°	90	90	90
80°	47	47	47
90°	19	19	19
100°	7	7	7
110°	6	6	6
120°	6	6	6
130°	7	7	7
140°	7	7	7
150°	7	7	7
160°	7	7	7
170°	6	6	6
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数		固有照明率 (×0.01)																			
0.60		62	57	48	45	39	38	60	55	47	44	38	37	45	43	37	37	36	36	31	29
0.80		74	67	60	56	50	48	71	65	58	55	50	48	56	53	48	47	47	46	41	39
1.00		81	73	67	62	57	55	78	71	65	61	56	54	62	59	55	53	53	51	47	44
1.25		88	79	75	69	66	62	85	77	73	68	64	61	69	65	62	59	60	58	53	51
1.50		93	82	81	73	72	66	90	80	79	72	70	66	74	70	67	64	64	62	58	55
2.00		102	88	91	81	82	75	98	86	88	79	80	74	83	77	76	72	73	70	66	63
2.50		106	92	96	85	88	80	102	90	93	84	86	79	87	81	82	76	78	74	70	68
3.00		110	94	101	88	94	84	105	92	98	87	91	82	91	84	86	80	81	78	74	71
4.00		114	97	107	93	101	89	110	95	103	91	98	87	96	88	92	85	87	82	79	76
5.00		117	99	111	95	106	92	112	97	107	94	102	91	99	91	96	88	90	85	82	79
10.00		123	103	120	101	116	99	118	101	115	99	112	97	106	96	104	94	97	92	89	86

