


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDP81031PW-LD

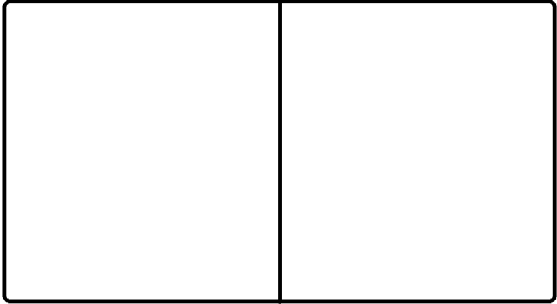

効 率	F	11 %
	F	89 %
	F	100 %
	器具 光束	3390 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	337	337	337
10°	341	341	341
20°	327	327	327
30°	285	285	285
40°	228	228	228
50°	168	168	168
60°	118	118	118
70°	60	60	60
80°	41	41	41
90°	27	27	27
100°	25	25	25
110°	22	22	22
120°	19	19	19
130°	16	16	16
140°	13	13	13
150°	10	10	10
160°	7	7	7
170°	4	4	4
180°	2	2	2

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	固有照明率 (×0.01)																			
0.60	63	58	49	47	41	40	60	56	48	46	40	39	46	44	39	38	37	37	32	30
0.80	75	68	61	57	52	50	72	66	59	56	51	49	56	54	49	48	47	46	42	39
1.00	81	73	68	63	59	56	78	71	66	62	58	55	62	59	55	53	53	51	47	44
1.25	89	79	76	70	67	63	85	76	74	68	65	62	69	65	62	60	59	57	53	50
1.50	93	82	82	74	73	68	89	80	79	72	71	66	74	69	67	64	64	61	57	54
2.00	101	88	91	81	83	75	97	86	87	79	80	74	81	76	75	71	71	68	64	61
2.50	106	91	96	85	89	80	101	89	93	83	86	78	86	79	80	75	75	72	68	65
3.00	109	93	101	88	94	83	104	91	97	86	90	82	89	82	84	78	79	75	71	68
4.00	113	96	106	92	100	88	108	94	102	90	97	86	94	86	90	83	83	79	76	72
5.00	116	98	110	94	105	91	110	95	105	92	101	89	96	88	93	85	86	82	78	74
10.00	121	102	118	100	115	98	116	99	113	97	110	95	103	93	101	91	92	87	84	80

