


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDP82013PL-LD

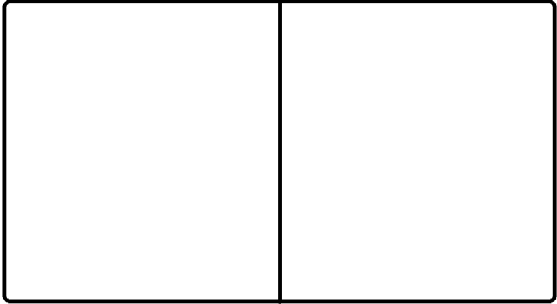

効 率	F	18%
	F	82%
	F	100%
	器具光束	4060 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	塗装(白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度(cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	263	263	263
10°	260	260	260
20°	244	244	244
30°	216	216	216
40°	182	182	182
50°	149	149	149
60°	119	119	119
70°	92	92	92
80°	65	65	65
90°	42	42	42
100°	40	40	40
110°	36	36	36
120°	31	31	31
130°	26	26	26
140°	20	20	20
150°	14	14	14
160°	9	9	9
170°	4	4	4
180°	1	1	1

反射率(%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率(×0.01)																			
0.60	58	53	44	42	35	34	55	51	42	40	34	33	39	38	32	32	31	30	25	23
0.80	69	63	55	51	46	44	66	60	53	50	44	43	49	47	42	40	39	38	33	30
1.00	76	68	62	57	52	50	72	65	59	55	51	48	55	52	47	46	44	43	38	35
1.25	83	74	70	64	60	56	79	71	67	62	58	55	61	58	54	52	50	49	43	40
1.50	88	78	75	68	66	61	83	75	72	66	63	59	66	62	59	56	54	53	47	44
2.00	96	84	85	76	76	69	91	80	81	73	73	67	74	68	67	63	62	60	54	50
2.50	101	87	90	80	82	74	95	84	86	77	79	72	78	72	72	68	66	64	59	54
3.00	104	90	95	83	87	78	99	86	90	81	83	76	82	75	76	71	70	67	62	57
4.00	109	93	101	88	95	83	103	90	96	85	90	81	87	79	82	76	75	71	67	62
5.00	112	95	105	90	99	87	106	92	100	88	95	84	90	82	86	79	78	74	70	65
10.00	119	99	115	97	111	94	112	96	108	94	105	91	97	88	95	86	85	81	77	72

