


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDP86033PW-LD

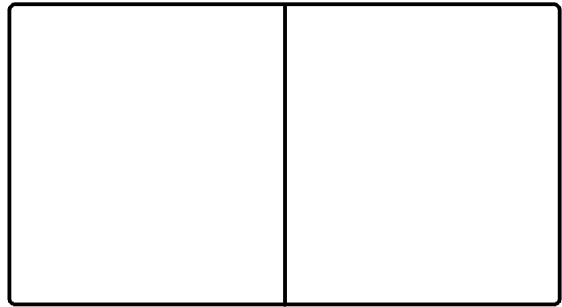

効 率	F	12%
	F	88%
	F	100%
	器具 光束	4960 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	塗装(白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度(cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	319	319	319
10°	313	311	312
20°	291	288	290
30°	255	251	255
40°	211	208	212
50°	165	164	166
60°	124	126	124
70°	89	90	87
80°	55	55	54
90°	25	25	26
100°	24	24	25
110°	23	23	24
120°	21	20	22
130°	17	16	18
140°	12	12	14
150°	9	8	10
160°	6	5	6
170°	3	3	3
180°	2	2	2

反射率(%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0	
室指数	固有照明率(×0.01)																								
0.60	61	56	47	44	38	37	58	54	45	43	37	36	43	41	36	35	35	34	29	27					
0.80	72	66	58	55	49	47	69	63	56	53	48	46	53	51	46	45	44	43	38	36					
1.00	79	71	65	60	56	53	76	69	63	59	55	52	59	56	52	50	49	48	43	41					
1.25	87	77	73	67	64	60	83	74	71	65	62	59	66	62	59	56	56	54	49	46					
1.50	91	80	79	71	69	64	87	78	76	70	67	63	71	66	64	61	60	58	53	50					
2.00	99	86	88	79	80	73	95	84	85	77	77	71	79	73	72	68	68	65	61	57					
2.50	104	90	94	83	86	77	99	87	90	81	83	76	83	77	78	73	73	70	65	62					
3.00	107	92	99	86	91	81	102	89	94	84	88	80	87	80	82	76	76	73	69	65					
4.00	112	95	105	91	98	86	107	93	100	88	95	85	92	84	88	81	81	77	73	70					
5.00	115	97	109	93	103	90	109	95	104	91	99	88	95	87	91	84	84	80	76	73					
10.00	121	101	117	99	114	97	115	99	112	97	109	95	102	92	100	90	91	86	83	79					

