


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87911L-LS

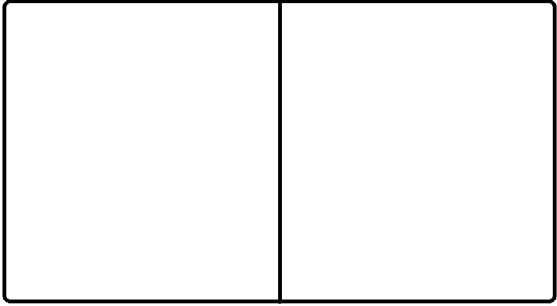

効 率	F $\frac{1}{2}$	46%
	F $\frac{1}{4}$	54%
	F \bigcirc	100%
	器具 光束	245 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.5 H
B-B	3.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	41	41	41
10°	42	49	44
20°	42	69	56
30°	41	92	68
40°	38	113	80
50°	35	132	90
60°	31	148	97
70°	27	159	102
80°	22	166	104
90°	16	161	98
100°	16	158	97
110°	16	147	90
120°	15	132	82
130°	13	114	72
140°	13	92	65
150°	16	73	56
160°	18	54	40
170°	6	29	19
180°	1	1	1

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																								
0.60	48	44	33	31	24	24	43	40	30	29	22	22	25	24	19	18	15	15	10	6					
0.80	57	52	42	39	32	31	52	48	38	36	30	28	32	30	25	24	20	19	14	9					
1.00	64	57	49	45	38	36	58	52	44	42	35	34	37	35	29	28	24	23	17	12					
1.25	71	63	56	51	45	43	64	58	51	47	42	40	42	40	35	33	28	28	21	15					
1.50	76	67	61	56	51	47	69	61	56	52	47	44	46	43	39	37	32	31	24	17					
2.00	84	73	71	63	61	55	76	67	65	59	56	51	53	49	46	44	38	36	29	22					
2.50	89	77	77	68	67	61	80	71	70	63	62	56	58	53	51	48	42	40	33	25					
3.00	93	79	82	72	73	65	84	73	75	66	67	60	61	56	55	51	45	43	36	27					
4.00	98	83	89	77	80	71	89	77	81	71	74	66	66	61	61	56	50	47	40	31					
5.00	101	85	93	80	86	74	92	79	85	74	78	69	70	63	65	60	53	50	43	34					
10.00	108	91	103	87	99	84	99	84	94	81	90	78	78	70	74	68	61	57	51	41					

