


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87927YL-LS

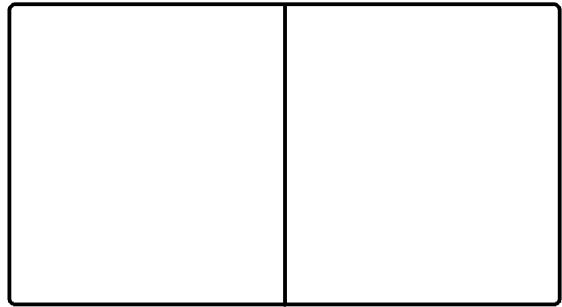

効 率	F	10%
	F	90%
	F	100%
	器具 光束	380 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	227		
10°	228		
20°	240		
30°	224		
40°	205		
50°	177		
60°	142		
70°	105		
80°	72		
90°	46		
100°	28		
110°	18		
120°	12		
130°	7		
140°	4		
150°	3		
160°	1		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
室指数	固有照明率 (×0.01)																								
0.60	57	53	42	40	34	33	55	51	41	39	33	32	39	37	32	31	30	30	25	23					
0.80	69	62	54	50	44	42	66	60	52	49	43	41	49	47	41	40	39	39	33	31					
1.00	76	68	61	57	51	48	72	66	59	55	50	48	55	52	47	46	45	44	39	36					
1.25	83	74	69	63	59	55	80	72	67	62	58	54	62	59	55	52	52	50	45	42					
1.50	88	78	75	68	65	60	84	75	72	66	63	59	67	63	60	57	57	55	49	46					
2.00	97	84	85	76	75	69	92	82	82	74	73	67	76	70	69	65	65	62	57	54					
2.50	102	88	91	80	82	74	97	85	87	78	79	73	81	75	74	70	70	67	62	59					
3.00	105	90	96	84	88	78	100	88	92	82	84	76	85	78	79	73	74	70	66	62					
4.00	110	94	102	88	95	84	105	91	98	86	92	82	90	82	85	79	79	75	71	67					
5.00	113	96	106	91	100	87	108	93	102	89	96	85	93	85	89	82	82	78	74	71					
10.00	120	100	116	98	112	95	114	98	111	95	107	93	101	91	98	89	91	86	82	79					

