


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87930L (W) -LS

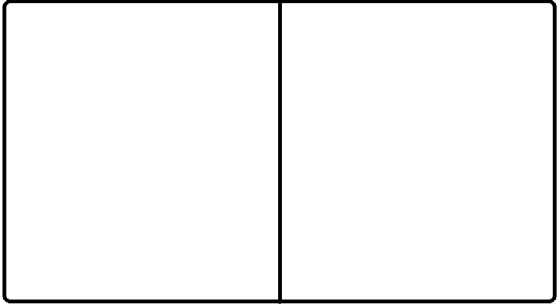

効 率	F	22 %
	F	78 %
	F	100 %
	器具 光束	420 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	207	207	205
10°	203	206	205
20°	190	198	195
30°	169	185	180
40°	144	172	162
50°	115	163	143
60°	86	153	125
70°	57	137	104
80°	29	113	80
90°	8	92	62
100°	6	83	56
110°	4	74	49
120°	4	64	42
130°	3	53	34
140°	2	41	26
150°	1	29	17
160°	1	16	9
170°	1	3	1
180°	1	1	1

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	0	30	10	0	30	10	0	10	0		
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数	固有照明率 (×0.01)																								
0.60	55	51	41	39	32	31	52	48	39	37	31	30	36	34	29	28	27	26	21	19					
0.80	66	60	51	48	42	40	62	57	49	46	40	39	45	43	37	36	34	34	28	25					
1.00	73	65	58	54	48	46	69	62	55	52	46	44	50	48	43	41	39	38	33	29					
1.25	80	71	66	61	56	52	75	68	63	58	54	51	57	54	49	47	45	44	38	34					
1.50	85	75	72	65	62	57	80	71	68	62	59	55	61	57	54	51	49	48	42	38					
2.00	93	81	81	73	72	65	88	78	77	70	68	63	69	64	62	59	57	55	49	44					
2.50	98	85	87	77	78	71	92	81	82	74	75	68	74	68	68	63	61	59	53	48					
3.00	102	87	92	81	84	75	96	84	87	77	80	72	78	71	72	67	65	62	57	51					
4.00	107	91	98	85	91	80	100	87	93	82	87	77	83	76	78	72	70	67	61	56					
5.00	110	93	103	88	96	84	103	89	97	85	91	81	86	78	82	75	73	70	65	59					
10.00	117	97	112	95	108	92	109	94	106	91	102	89	94	85	91	83	81	77	72	66					

