


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87035N-LS

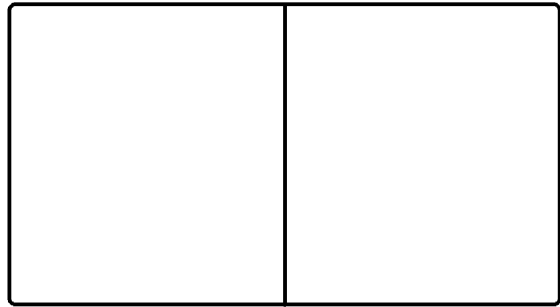

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	400 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	339	339	339
10°	335	333	335
20°	319	315	318
30°	291	287	290
40°	255	249	253
50°	209	203	207
60°	158	151	156
70°	104	96	101
80°	51	43	48
90°	5	0	3
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0	
室指数	固有照明率 (×0.01)																								
0.60	62	57	48	46	39	38	61	56	47	45	39	38	46	44	38	37	38	37	32	31					
0.80	75	68	60	56	51	49	72	66	59	56	50	48	57	54	49	48	48	47	42	40					
1.00	82	74	68	63	58	55	79	72	66	62	57	55	64	60	56	54	55	53	48	46					
1.25	90	80	76	70	67	63	87	78	75	69	66	62	71	67	64	61	62	60	55	53					
1.50	95	84	82	75	73	68	92	82	80	74	72	67	76	72	69	66	67	65	60	58					
2.00	103	90	92	82	84	76	100	88	90	81	82	76	85	79	79	74	76	73	69	67					
2.50	108	93	98	87	90	81	104	92	96	86	88	81	90	84	85	79	81	78	74	72					
3.00	112	96	103	90	96	85	108	94	100	89	93	85	94	87	89	83	85	81	78	76					
4.00	117	99	109	95	103	91	112	98	106	94	100	90	100	91	95	88	91	86	83	81					
5.00	119	101	113	97	108	94	115	99	110	96	105	93	103	94	99	91	94	89	87	85					
10.00	125	105	122	103	119	101	121	104	118	102	115	100	110	99	108	98	102	96	94	92					

