


東芝ランプ 配光データシート

名称	LED電球 ミニクリプトン形
形名	LDA7N-G-E17 /S/60W
光束	860 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

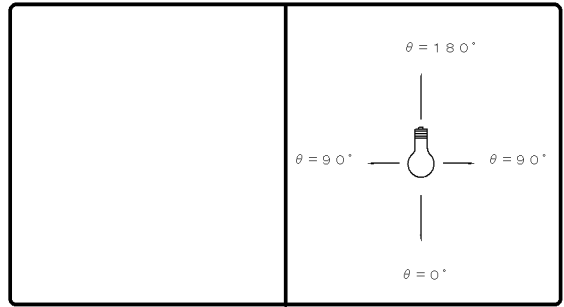

効率	F	%
	F	%
	F	100 %
	器具光束	860 lm

最大取付間隔	
A-A	1.43 H
B-B	1.43 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	158		
10°	157		
20°	154		
30°	149		
40°	141		
50°	131		
60°	120		
70°	107		
80°	93		
90°	79		
100°	66		
110°	52		
120°	40		
130°	28		
140°	19		
150°	10		
160°	5		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	53	49	38	36	29	28	50	46	36	35	28	27	33	31	26	25	23	23	18	15																	
0.80	63	58	48	45	38	37	59	54	46	43	37	35	41	39	33	32	30	30	24	21																	
1.00	70	63	55	51	45	42	66	60	52	49	43	41	47	44	39	38	35	34	29	25																	
1.25	78	69	63	58	52	49	73	65	59	55	50	47	53	50	45	43	41	40	34	29																	
1.50	83	73	68	62	58	54	77	69	65	59	55	52	57	54	50	47	45	43	37	33																	
2.00	91	79	78	70	68	62	85	75	74	67	65	60	65	61	58	55	52	50	44	39																	
2.50	96	83	84	74	75	67	89	78	79	71	71	65	70	65	63	59	57	54	48	43																	
3.00	100	85	89	78	80	71	93	81	84	74	76	69	74	68	68	63	60	58	52	46																	
4.00	105	89	96	83	88	77	98	85	90	79	83	74	79	72	74	68	65	62	57	51																	
5.00	108	91	100	86	93	81	101	87	94	82	88	78	82	75	78	71	69	65	60	54																	
10.00	115	96	110	93	106	90	107	92	103	89	99	86	91	82	88	79	77	73	68	62																	

