




# 東芝照明器具配光データシート


|     |                 |
|-----|-----------------|
| 名 称 | LED 街路灯         |
| 形 名 | LEDG-10814N (K) |

|    |     |             |
|----|-----|-------------|
| 光源 | 名 称 | LED         |
|    | 形 名 | —           |
|    | 光束  | 5400 lm × 1 |



|     |           |
|-----|-----------|
| 前 面 | グローブ (乳白) |
| 反射面 |           |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.78 |
|     | 中 | 0.76 |
|     | 否 | 0.72 |

|     |   |         |
|-----|---|---------|
| 効 率 | F  | 27.8 %  |
|     | F  | 72.2 %  |
|     | F  | 100 %   |
|     | 器具光束  | 5400 lm |

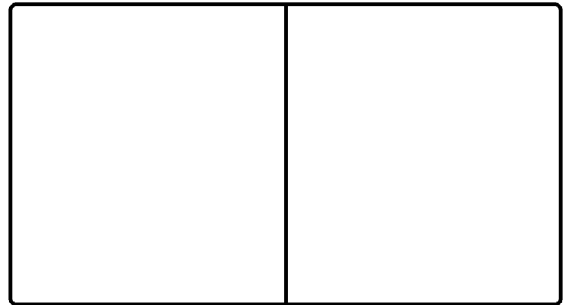

|     |  |
|-----|--|
| 備 考 |  |
|-----|--|

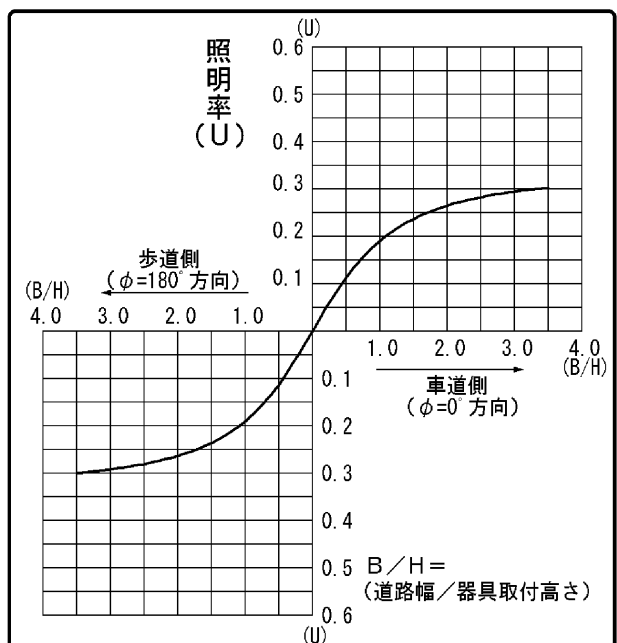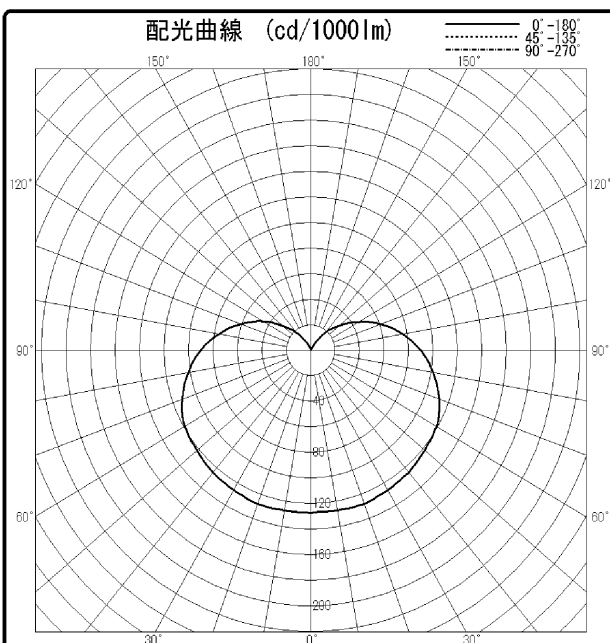

|       |     | 光度 (cd/1000lm) |     |     |      |      |
|-------|-----|----------------|-----|-----|------|------|
| θ \ φ |     | 0°             | 45° | 90° | 135° | 180° |
| 0°    | 127 |                |     |     |      |      |
| 10°   | 127 |                |     |     |      |      |
| 20°   | 128 |                |     |     |      |      |
| 30°   | 126 |                |     |     |      |      |
| 40°   | 125 |                |     |     |      |      |
| 50°   | 122 |                |     |     |      |      |
| 60°   | 119 |                |     |     |      |      |
| 70°   | 112 |                |     |     |      |      |
| 80°   | 102 |                |     |     |      |      |
| 90°   | 90  |                |     |     |      |      |
| 100°  | 76  |                |     |     |      |      |
| 110°  | 61  |                |     |     |      |      |
| 120°  | 45  |                |     |     |      |      |
| 130°  | 30  |                |     |     |      |      |
| 140°  | 17  |                |     |     |      |      |
| 150°  | 7   |                |     |     |      |      |
| 160°  | 1   |                |     |     |      |      |
| 170°  | 0   |                |     |     |      |      |
| 180°  | 0   |                |     |     |      |      |

