

東芝照明器具配光データシート

| | |
|----|----------------|
| 名称 | LED街路灯 |
| 形名 | LEDG-10816N(S) |



| | | |
|-----|---|------|
| 保守率 | 良 | 0.78 |
| | 中 | 0.76 |
| | 否 | 0.72 |

| | | |
|----|----|-------------|
| 光源 | 名称 | LED |
| | 形名 | — |
| | 光束 | 5400 lm × 1 |

| | | |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 27.8 % |
| | F $\frac{3}{4}$ | 72.2 % |
| | F \bigcirc | 100 % |
| | 器具光束 | 5400 lm |

| | |
|-----|----------|
| 前面 | グローブ(乳白) |
| 反射面 | |

| | |
|----|--|
| 備考 | |
|----|--|

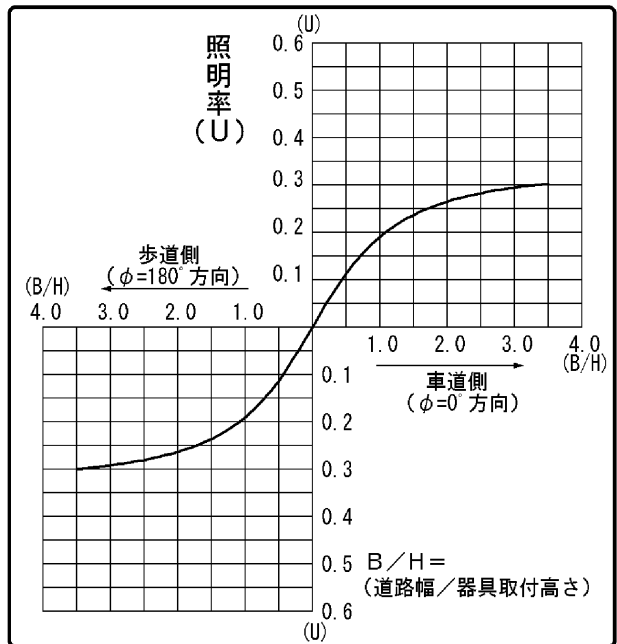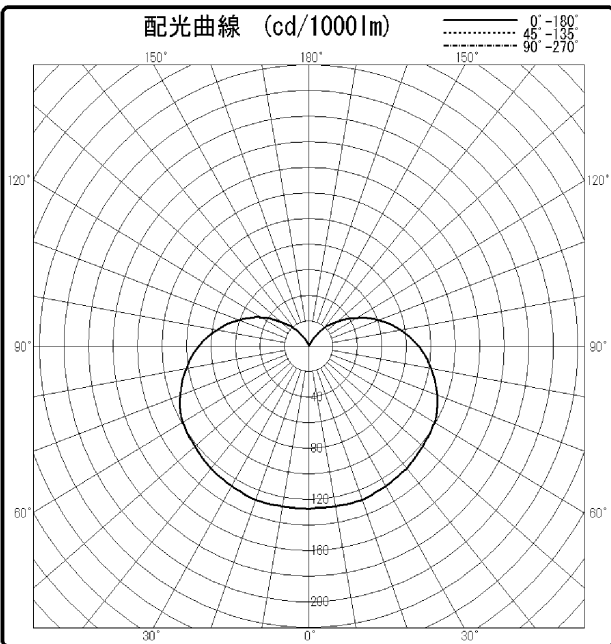

| $\theta \backslash \phi$ | 0° | 45° | 90° | 135° | 180° |
|--------------------------|-----|-----|-----|------|------|
| 0° | 127 | | | | |
| 10° | 127 | | | | |
| 20° | 128 | | | | |
| 30° | 126 | | | | |
| 40° | 125 | | | | |
| 50° | 122 | | | | |
| 60° | 119 | | | | |
| 70° | 112 | | | | |
| 80° | 102 | | | | |
| 90° | 90 | | | | |
| 100° | 76 | | | | |
| 110° | 61 | | | | |
| 120° | 45 | | | | |
| 130° | 30 | | | | |
| 140° | 17 | | | | |
| 150° | 7 | | | | |
| 160° | 1 | | | | |
| 170° | 0 | | | | |
| 180° | 0 | | | | |

