


■ 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF4LWX53/ C7/400
光束	410 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

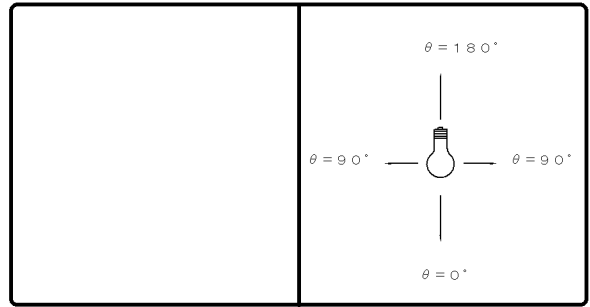

効率	F		%
	F		%
	F	100	%
	器具光束	410	lm

最大取付間隔	
A-A	0.71 H
B-B	0.71 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	1160		
10°	1018		
20°	669		
30°	273		
40°	148		
50°	100		
60°	70		
70°	48		
80°	30		
90°	13		
100°	10		
110°	6		
120°	5		
130°	5		
140°	6		
150°	5		
160°	4		
170°	4		
180°	2		

反射率 (%)	天井			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	10	0								
	床			30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	照明率 (×0.01)																			
0.60	74	68	62	59	55	53	72	67	61	58	54	53	59	57	53	52	52	51	48	46
0.80	84	76	72	67	64	61	81	75	70	66	63	61	68	65	62	60	60	59	55	54
1.00	91	82	80	74	72	68	89	81	78	73	71	68	75	71	69	66	67	65	62	60
1.25	97	86	86	79	78	73	94	85	84	78	77	72	80	76	74	71	72	70	66	64
1.50	101	89	91	83	83	77	98	88	89	81	82	76	84	79	79	75	76	73	70	68
2.00	108	94	98	88	91	83	104	92	96	87	89	82	90	84	85	80	82	79	75	73
2.50	112	96	103	91	96	87	107	94	100	90	94	86	94	87	90	84	85	82	79	76
3.00	114	98	107	94	101	90	110	96	104	92	98	89	97	90	93	87	88	85	81	79
4.00	118	101	112	97	107	94	114	99	108	96	104	93	102	93	98	90	93	88	85	83
5.00	121	102	116	99	111	97	116	100	112	98	108	96	104	95	101	93	95	91	88	85
10.00	126	105	123	104	121	103	121	104	119	103	117	101	110	100	109	99	102	96	94	91

