


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84804-LC

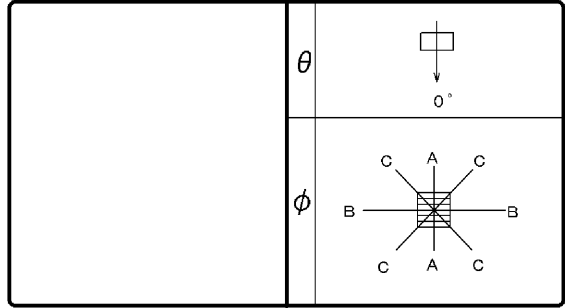

効 率	F	16%
	F	84%
	F	100%
	器具 光束	4300 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	260	260	260
10°	256	256	256
20°	245	245	245
30°	226	226	226
40°	202	202	202
50°	170	170	170
60°	132	132	132
70°	91	91	91
80°	49	49	49
90°	24	24	24
100°	23	23	23
110°	24	24	24
120°	25	25	25
130°	27	27	27
140°	27	27	27
150°	27	27	27
160°	27	27	27
170°	30	30	30
180°	31	31	31

反 射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数		固有照明率 (×0.01)																																			
0.60		58	54	44	42	36	34	56	52	43	41	35	34	40	38	33	32	31	31	26	24																
0.80		70	63	56	52	46	44	67	61	54	51	45	43	50	48	43	41	40	39	34	32																
1.00		77	69	63	58	53	51	73	66	60	56	52	49	56	53	49	47	46	45	40	36																
1.25		85	75	71	65	61	58	80	72	68	63	59	56	63	59	56	53	52	51	46	42																
1.50		89	79	77	70	67	62	85	76	74	67	65	61	68	63	61	58	57	55	50	46																
2.00		98	85	86	77	78	71	93	82	83	75	75	69	76	70	69	66	65	62	57	53																
2.50		102	88	92	82	84	76	97	85	88	79	81	74	81	74	75	70	69	66	62	58																
3.00		106	91	97	85	90	80	100	88	93	82	86	78	84	78	79	74	73	70	65	61																
4.00		111	94	103	89	97	85	105	91	98	87	93	83	89	82	85	79	78	74	70	66																
5.00		114	96	107	92	102	88	108	93	102	89	97	86	92	84	89	82	81	77	73	69																
10.00		120	100	116	98	113	96	113	97	110	95	107	93	99	90	97	88	88	83	80	75																

