


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87935YL (S) -LS

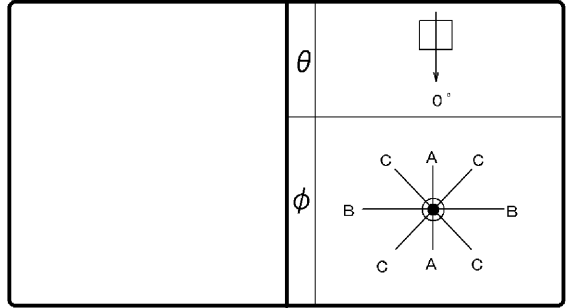

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	370 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

θ	ϕ	光度 (cd/1000lm)		
		A-A	B-B	C-C
0°		344		
10°		338		
20°		320		
30°		291		
40°		252		
50°		206		
60°		153		
70°		98		
80°		44		
90°		2		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		1		
170°		1		
180°		1		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	固有照明率 (×0.01)																																				
0.60	62	57	48	46	39	38	60	56	47	45	39	38	46	44	38	37	38	37	32	31																	
0.80	75	68	60	56	51	49	72	66	59	56	50	49	57	54	49	48	48	47	43	41																	
1.00	82	73	68	63	58	55	79	72	66	62	58	55	64	60	56	54	55	53	49	47																	
1.25	89	79	76	70	67	63	87	78	74	69	66	62	71	67	64	61	62	60	55	53																	
1.50	95	83	82	74	73	68	91	82	80	73	72	67	76	72	69	66	67	65	60	58																	
2.00	103	90	92	82	83	76	99	88	90	81	82	75	85	79	79	74	76	73	69	67																	
2.50	108	93	98	87	90	81	104	91	95	85	88	80	90	83	84	79	81	78	74	72																	
3.00	111	95	103	90	95	85	107	94	100	89	93	84	94	87	89	83	85	81	78	76																	
4.00	116	99	109	94	103	90	112	97	106	93	100	90	99	91	95	88	90	86	83	81																	
5.00	119	100	113	97	108	94	114	99	109	96	104	93	102	93	99	91	94	89	86	84																	
10.00	125	104	121	102	118	101	120	103	117	101	114	100	109	99	107	97	101	96	94	91																	

