


# 東芝照明器具配光データシート

名 称	LED照明器具
形 名	LEDG87938L (S) -LS

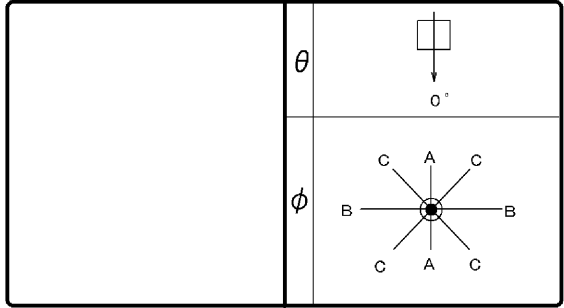

効 率	F ◡	0 %
	F ◣	100 %
	F ○	100 %
	器具 光束	435 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前 面	
反 射 面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	485		
10°	482		
20°	463		
30°	424		
40°	340		
50°	142		
60°	60		
70°	46		
80°	21		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	1		
150°	1		
160°	1		
170°	1		
180°	1		

反 射 率 (%)	天井			70			50			30			20			0				
	壁			70			50			30			10			0				
	床			30			10			30			10			0				
室指数				固有照明率 (×0.01)																
0.60	72	66	59	56	52	50	70	65	58	56	51	50	57	55	51	49	50	49	45	44
0.80	84	77	72	68	64	62	82	75	71	67	64	61	69	66	63	61	62	60	57	55
1.00	91	81	79	73	71	67	88	80	78	73	70	67	75	71	69	66	67	66	62	60
1.25	97	87	86	79	79	74	95	85	85	78	78	73	82	77	76	72	74	71	68	66
1.50	102	90	92	83	84	78	99	88	90	82	83	77	86	81	80	76	78	75	72	70
2.00	109	95	100	89	93	85	105	93	98	88	91	84	93	87	88	83	85	82	79	77
2.50	113	97	105	93	98	89	109	96	102	92	96	88	97	90	92	87	89	85	82	81
3.00	115	99	108	95	103	92	112	98	105	94	100	91	100	92	96	89	92	88	85	83
4.00	119	101	113	98	108	95	115	100	110	97	106	94	104	95	100	93	96	91	89	87
5.00	121	102	116	100	112	97	117	101	113	99	109	97	106	97	103	95	98	93	91	89
10.00	126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	96	94

