


東芝照明器具配光データシート

名称	LEDベット灯
形名	LEDA-21001M N-LS1

保守率	良	0.76
	中	0.72
	否	0.64

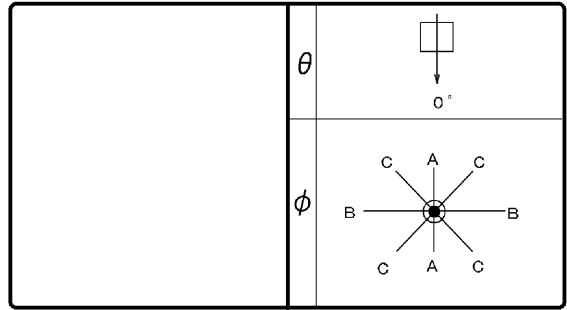

光源	名称	LEDモジュール
	形名	LEM-011003 (W)
	光束	95 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	95 lm

最大取付間隔		備考
A-A	0.5 H	
B-B	0.5 H	

前面	レンズ (透明)
反射面	

0°	4020	25°	142
1°		30°	68
2°		35°	51
3°		40°	38
4°		45°	25
5°	3757	50°	15
6°		55°	11
7°		60°	7
8°		65°	4
9°		70°	2
10°	2922	75°	2
11°		80°	1
12°		85°	1
13°		90°	0
14°			
15°	1778		
16°			
17°			
18°			
19°			
20°	692		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	108	100	103	98	99	96	107	99	102	97	99	96	101	97	98	96	97	96	95	94
0.80	116	105	111	104	108	103	114	105	110	104	107	103	108	103	106	103	104	102	102	101
1.00	116	104	110	102	106	101	114	103	109	102	105	101	107	101	104	100	102	100	99	98
1.25	116	103	110	101	106	99	113	102	108	100	104	99	105	99	102	98	100	97	96	95
1.50	117	103	111	101	107	99	114	102	109	100	106	99	106	99	103	98	101	97	96	95
2.00	119	103	113	101	109	100	116	103	111	101	107	99	107	99	104	98	101	97	96	94
2.50	121	104	116	102	112	101	117	103	113	101	109	100	108	100	105	99	102	98	96	95
3.00	122	105	118	103	114	102	119	104	115	102	112	101	109	101	107	100	103	98	97	96
4.00	125	106	121	105	118	104	121	105	118	104	116	103	112	102	110	102	105	100	99	98
5.00	127	107	124	106	122	106	123	106	120	105	118	105	114	104	112	103	107	102	101	99
10.00	131	109	130	110	129	110	126	108	126	109	125	109	118	107	118	107	111	105	105	103

