


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF10LH53/C 20/1200
光束	1200 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

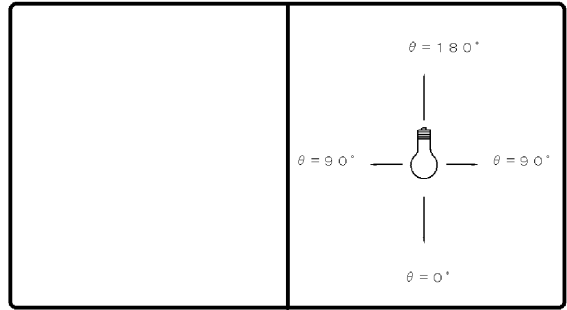

効 率	F	%
	F	%
	F	100 %
	器具 光束	1200 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	192		
10°	190		
20°	186		
30°	181		
40°	181		
50°	181		
60°	172		
70°	144		
80°	108		
90°	38		
100°	12		
110°	6		
120°	6		
130°	6		
140°	6		
150°	6		
160°	5		
170°	4		
180°	4		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照 明 率 (×0.01)																																				
0.60	54	50	39	37	29	28	52	48	37	36	29	28	35	34	27	27	26	26	21	19																	
0.80	65	59	49	46	39	37	62	57	48	45	38	36	45	43	36	35	35	34	29	26																	
1.00	72	65	56	52	46	43	69	63	55	51	45	43	51	49	43	41	41	40	34	31																	
1.25	80	71	65	59	54	51	77	69	63	58	53	50	59	55	50	48	48	46	40	37																	
1.50	86	75	71	64	60	56	82	73	68	63	58	55	64	60	55	53	53	51	45	42																	
2.00	95	82	81	73	71	65	90	80	78	71	69	64	73	68	65	61	62	59	54	51																	
2.50	100	86	88	78	78	71	95	84	85	76	76	69	79	73	71	67	67	64	59	56																	
3.00	104	89	93	82	84	75	99	87	90	80	82	74	83	76	76	71	72	69	64	61																	
4.00	110	93	101	87	93	82	104	91	97	85	90	80	89	82	84	77	78	75	70	67																	
5.00	113	95	105	90	98	86	108	93	101	88	95	84	93	85	88	81	82	78	74	71																	
10.00	120	101	116	98	112	95	115	99	111	96	107	93	102	92	99	90	92	87	84	81																	

