


# 東芝照明器具配光データシート

名称	東芝LED器具
形名	LEKR426693N-LS9+F-42124

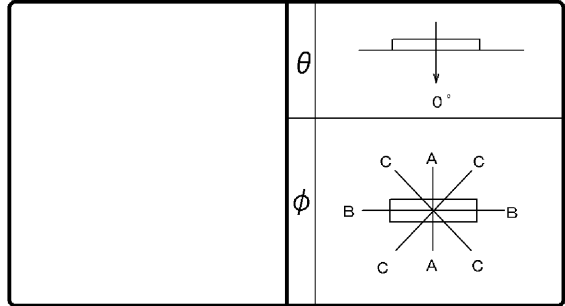

効率	F	1 %
	F	99 %
	F	100 %
	器具光束	5200 lm

保守率	良	0.81
	中	0.77
	否	0.72

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
$0^\circ$	327	327	327
$10^\circ$	323	319	321
$20^\circ$	308	302	304
$30^\circ$	283	274	276
$40^\circ$	249	234	240
$50^\circ$	207	189	197
$60^\circ$	158	140	150
$70^\circ$	108	91	103
$80^\circ$	63	43	58
$90^\circ$	24	4	19
$100^\circ$	9	3	3
$110^\circ$	0	2	0
$120^\circ$	0	1	0
$130^\circ$	0	0	0
$140^\circ$	0	0	0
$150^\circ$	0	0	0
$160^\circ$	0	0	0
$170^\circ$	1	0	1
$180^\circ$	1	1	1

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 ( $\times 0.01$ )																							
0.60		61	56	47	45	38	37	59	55	46	44	38	37	44	43	37	36	36	36	31	29				
0.80		73	67	59	55	49	47	71	65	58	54	49	47	55	53	48	46	47	45	41	39				
1.00		81	72	66	61	57	54	78	71	65	61	56	53	62	59	54	52	53	51	47	44				
1.25		88	78	75	68	65	61	85	77	73	67	64	60	69	65	62	59	60	58	53	51				
1.50		93	82	80	73	71	66	90	80	78	72	70	65	74	70	67	64	65	63	58	56				
2.00		102	88	90	81	82	74	98	87	88	80	80	74	83	77	76	72	73	71	66	64				
2.50		106	92	96	85	88	79	102	90	93	84	86	79	88	81	82	77	79	75	71	69				
3.00		110	94	101	89	94	83	106	93	98	87	91	83	92	85	87	81	83	79	75	73				
4.00		115	98	107	93	101	89	110	96	104	92	98	88	97	89	93	86	88	84	81	78				
5.00		118	100	111	96	106	92	113	98	108	94	103	91	101	92	97	89	91	87	84	82				
10.00		124	104	120	101	117	99	119	102	116	100	113	98	108	97	106	96	99	94	91	89				

