


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH80357-LC

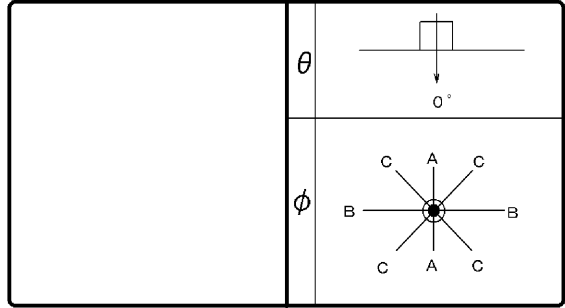

効 率	F ◡	8 %
	F ◡	92 %
	F ○	100 %
	器具 光束	3700 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	267	267	267
10°	265	265	265
20°	255	255	255
30°	238	239	239
40°	214	214	214
50°	183	183	183
60°	145	145	145
70°	104	104	104
80°	65	65	65
90°	36	36	36
100°	21	21	21
110°	12	12	12
120°	8	8	8
130°	6	6	6
140°	5	5	5
150°	6	6	6
160°	6	6	6
170°	7	7	7
180°	7	7	7

反射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																							
0.60		59	54	44	42	35	34	56	52	43	41	35	34	41	39	33	32	32	31	27	25				
0.80		70	64	55	52	46	44	67	62	54	51	45	43	51	49	43	42	42	41	36	33				
1.00		77	69	63	58	53	50	74	67	61	57	52	49	57	54	50	48	47	46	41	39				
1.25		85	76	71	65	61	57	81	73	69	64	60	56	65	61	57	54	54	53	47	45				
1.50		90	79	77	70	67	62	86	77	74	68	65	61	70	65	62	59	59	57	52	49				
2.00		99	86	87	77	77	71	94	83	84	76	75	69	78	72	71	67	67	65	60	57				
2.50		103	89	93	82	84	76	99	87	89	80	82	75	83	77	77	72	72	69	65	62				
3.00		107	92	98	85	90	80	102	89	94	84	87	78	87	80	81	76	76	73	69	65				
4.00		112	95	104	90	97	85	107	93	100	88	94	84	92	84	87	81	82	78	74	71				
5.00		115	97	108	93	102	89	110	95	104	91	98	87	96	87	91	84	85	81	77	74				
10.00		121	101	117	99	114	97	116	99	112	97	109	95	103	93	101	91	93	88	85	82				

