


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDP88140 (K) R

保守率	良	0.69
	中	0.67
	否	0.63

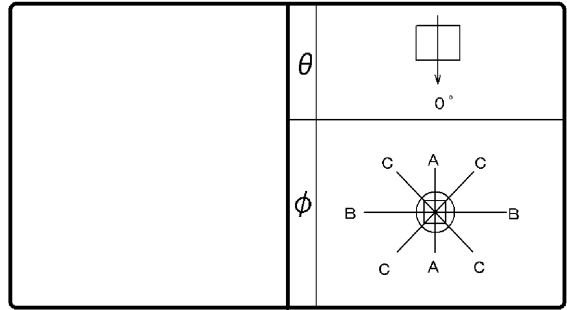

光源	名称	LEDランプ
	形名	LDG7L-G/60W
	光束	730 lm x 1

効率	F	30%
	F	70%
	F	100%
	器具光束	730 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

前面	
反射面	

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	136		
10°	135		
20°	133		
30°	130		
40°	126		
50°	120		
60°	112		
70°	103		
80°	93		
90°	82		
100°	71		
110°	60		
120°	49		
130°	39		
140°	29		
150°	22		
160°	16		
170°	11		
180°	1		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	照明率 (×0.01)																							
0.60	52	48	37	35	28	27	48	45	35	33	27	26	31	30	24	24	21	21	16	13				
0.80	62	56	47	44	37	36	58	53	44	42	35	34	39	37	32	31	28	27	22	18				
1.00	69	62	54	50	44	41	64	58	51	47	41	39	45	42	37	36	33	32	26	22				
1.25	76	68	62	56	51	48	71	64	58	53	48	46	51	48	43	41	38	37	31	26				
1.50	81	71	67	61	57	52	75	67	63	58	53	50	55	51	47	45	42	41	34	29				
2.00	89	78	77	68	66	61	83	73	72	65	63	58	62	58	55	52	49	47	41	35				
2.50	94	81	83	73	73	66	87	77	77	69	69	63	67	62	61	57	53	51	45	39				
3.00	98	84	87	77	78	70	91	79	82	73	74	67	71	65	65	60	57	54	48	42				
4.00	103	88	94	81	86	76	95	83	88	77	81	72	76	70	71	65	62	59	53	46				
5.00	106	90	98	84	91	80	98	85	92	80	85	76	79	72	75	69	65	62	56	49				
10.00	113	95	109	92	104	88	105	90	101	87	97	84	87	79	84	77	73	69	64	57				

