


# 東芝照明器具配光データシート

名称	LED街路灯
形名	LEDG-10902N (S)-LS9

保守率	良	0.83
	中	0.81
	否	0.77


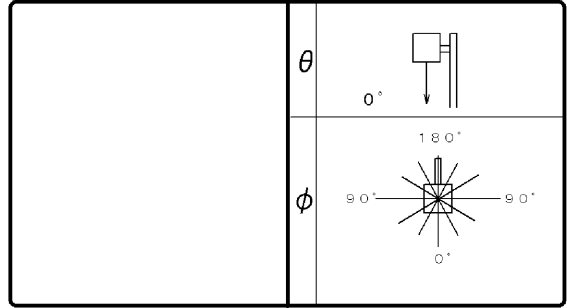


光源	名称	LED
	形名	-
	光束	11000 lm x 1

効率	F $\frac{1}{2}$	0.0 %
	F $\frac{1}{4}$	100 %
	F $\bigcirc$	100 %
	器具光束	11000 lm

備考

前面	ガラス(クリアー)
反射面	-

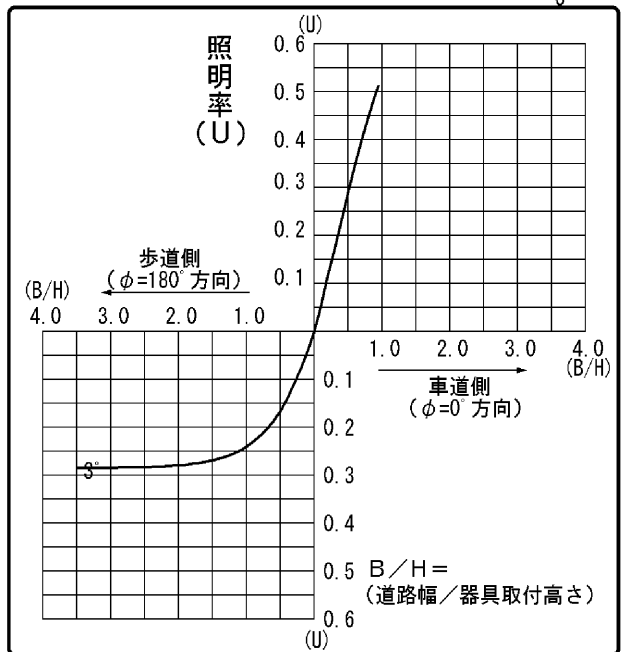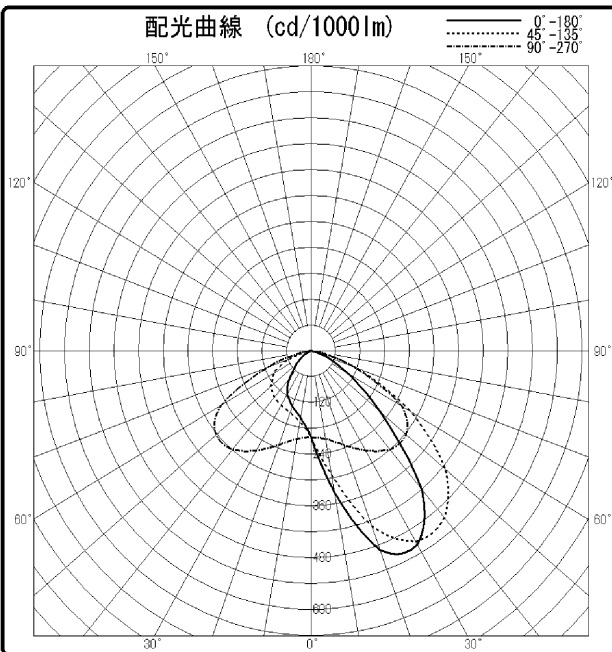

		光度 (cd/1000lm)				
$\theta \backslash \phi$	$0^\circ$	$45^\circ$	$90^\circ$	$135^\circ$	$180^\circ$	
$0^\circ$	200	201	201	200	200	
$10^\circ$	334	291	208	167	156	
$20^\circ$	491	431	232	153	137	
$30^\circ$	518	510	268	147	118	
$40^\circ$	421	505	299	141	80	
$50^\circ$	220	425	302	130	47	
$60^\circ$	96	278	253	107	23	
$70^\circ$	30	120	112	62	6	
$80^\circ$	10	20	13	5	2	
$90^\circ$	0	0	0	0	0	
$100^\circ$	0	0	0	0	0	
$110^\circ$	0	0	0	0	0	
$120^\circ$	0	0	0	0	0	
$130^\circ$	0	0	0	0	0	
$140^\circ$	0	0	0	0	0	
$150^\circ$	0	0	0	0	0	
$160^\circ$	0	0	0	0	0	
$170^\circ$	0	0	0	0	0	
$180^\circ$	0	0	0	0	0	

