


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKD2523105LV-LS9

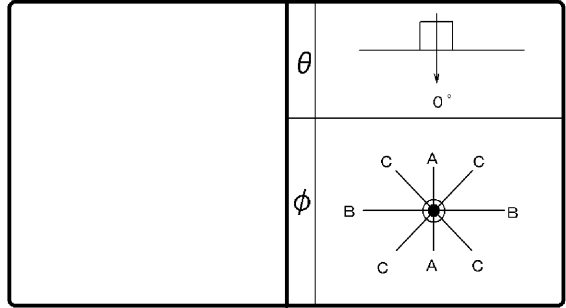

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	1560 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	銀色鏡面仕上げ

最大取付間隔	
A-A	0.87 H
B-B	0.87 H

備考

光度 (cd/1000lm)		A-A	B-B	C-C
$\theta \backslash \phi$				
0°		1375		
10°		1465		
20°		1159		
30°		429		
40°		27		
50°		0		
60°		0		
70°		0		
80°		0		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		

反 射 率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	固有照明率 (×0.01)																																															
0.60	100	92	92	88	88	85	98	91	92	87	88	85	90	87	87	85	86	84	83	82																												
0.80	109	99	103	96	99	95	108	99	102	96	98	94	100	95	97	94	96	94	92	92																												
1.00	111	100	104	97	100	95	109	99	103	97	99	95	101	96	97	94	96	94	92	91																												
1.25	113	101	107	98	102	96	111	100	105	97	101	95	102	96	99	94	97	94	92	91																												
1.50	115	102	109	99	104	97	113	101	107	98	103	97	104	97	100	96	98	95	93	92																												
2.00	118	103	113	101	108	99	115	102	110	100	106	98	106	99	103	97	100	96	95	93																												
2.50	120	104	115	102	111	100	117	103	112	101	109	99	108	100	105	98	101	97	96	94																												
3.00	122	104	117	103	113	101	118	103	114	102	111	100	109	100	106	99	102	98	96	95																												
4.00	124	106	121	104	117	103	120	105	117	103	114	102	111	102	109	101	104	99	98	97																												
5.00	126	106	123	105	120	104	122	105	119	104	117	104	113	103	111	102	106	100	99	98																												
10.00	129	108	128	108	127	108	125	107	124	107	123	107	116	105	115	105	109	103	102	100																												

