


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF10LH53C1 2/1200
光束	1200 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

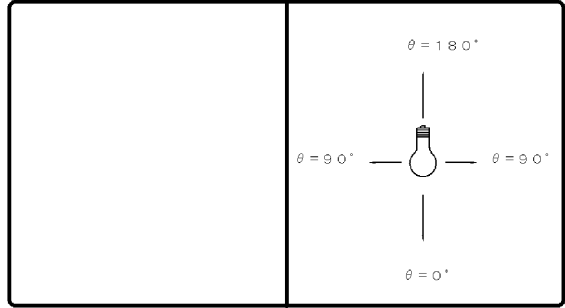

効率	F	%
	F	%
	F	100 %
	器具光束	1200 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		370	
10°		361	
20°		337	
30°		298	
40°		249	
50°		194	
60°		138	
70°		85	
80°		37	
90°		9	
100°		7	
110°		6	
120°		6	
130°		5	
140°		4	
150°		3	
160°		2	
170°		1	
180°		0	

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	64	58	50	47	41	40	62	57	49	46	41	39	47	45	40	39	39	38	34	32																	
0.80	76	69	62	58	53	51	73	67	61	57	52	50	58	55	51	49	49	48	44	42																	
1.00	83	74	69	64	60	57	80	73	68	63	59	56	65	61	57	55	56	54	50	47																	
1.25	90	80	77	71	68	64	87	78	75	70	67	63	72	68	65	62	62	61	56	54																	
1.50	95	84	83	75	74	69	92	82	81	74	73	68	77	72	70	67	67	65	61	58																	
2.00	103	90	93	83	84	77	100	88	90	82	83	76	85	79	79	74	76	73	69	66																	
2.50	108	93	99	87	91	82	104	91	95	86	89	81	90	83	84	79	80	77	73	71																	
3.00	111	96	103	90	96	86	107	94	100	89	93	85	94	86	89	83	84	81	77	74																	
4.00	116	99	109	94	103	91	111	97	105	93	100	90	99	90	94	87	89	85	82	79																	
5.00	119	100	113	97	108	94	114	99	109	95	104	92	102	93	98	90	92	88	85	82																	
10.00	124	104	121	102	118	100	119	102	117	101	114	99	108	98	106	96	99	94	92	89																	

