


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6N-H-GX5 3/700
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

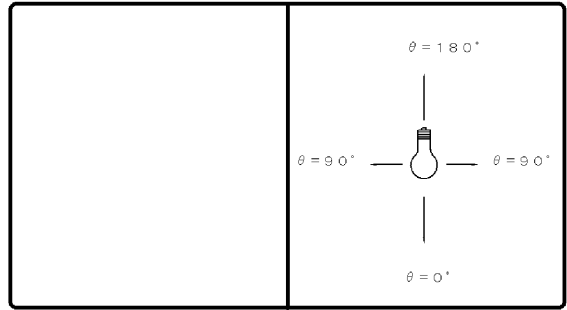

効 率	F		%
	F		%
	F	100	%
	器具 光束	770	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	363		
10°	355		
20°	331		
30°	292		
40°	243		
50°	189		
60°	135		
70°	84		
80°	39		
90°	13		
100°	11		
110°	10		
120°	8		
130°	7		
140°	5		
150°	3		
160°	2		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	63	58	49	47	41	40	61	57	48	46	40	39	46	45	39	38	38	38	33	31																	
0.80	75	68	61	58	52	50	73	67	60	57	52	50	57	55	50	49	49	48	43	41																	
1.00	82	74	69	64	59	56	79	72	67	63	58	56	64	61	56	54	55	53	49	46																	
1.25	90	80	77	70	68	63	87	78	75	69	66	63	71	67	64	61	61	60	55	53																	
1.50	95	83	83	75	74	68	91	81	80	74	72	67	76	71	69	66	66	64	60	57																	
2.00	103	89	92	82	84	76	99	87	89	81	82	75	84	78	78	73	74	72	67	65																	
2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	82	83	78	79	76	72	69																	
3.00	111	95	102	90	95	85	106	93	99	88	93	84	93	85	88	82	83	79	76	73																	
4.00	115	98	108	94	102	90	111	96	105	92	99	89	97	89	93	86	88	84	81	78																	
5.00	118	100	112	96	107	93	113	98	108	95	103	92	100	92	97	89	91	87	83	81																	
10.00	124	104	121	102	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	87																	

