


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6WW-W-GX 53/700
光束	740 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

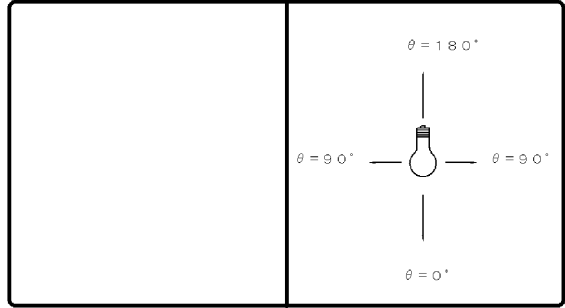

効率	F		%
	F		%
	F	100	%
	器具光束	740	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	1252		
10°	992		
20°	633		
30°	362		
40°	192		
50°	94		
60°	56		
70°	37		
80°	22		
90°	8		
100°	5		
110°	3		
120°	2		
130°	2		
140°	2		
150°	3		
160°	3		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照明率 (×0.01)																							
0.60	82	75	71	68	65	63	80	74	70	67	64	62	69	66	63	62	62	61	58	57				
0.80	93	84	83	78	76	73	91	83	82	77	75	72	79	76	74	72	73	71	68	67				
1.00	97	88	87	81	80	76	95	86	86	80	79	76	83	79	78	75	76	74	71	70				
1.25	102	91	93	85	86	80	100	90	91	84	84	80	87	82	82	79	80	78	75	73				
1.50	106	93	97	88	90	83	103	92	95	87	88	83	91	85	86	82	83	80	77	76				
2.00	112	97	103	92	97	88	108	96	101	91	95	88	96	89	91	86	88	85	82	80				
2.50	115	99	108	95	102	92	111	98	105	94	99	91	99	92	95	89	91	87	85	83				
3.00	117	101	111	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	87	85				
4.00	121	103	115	100	111	97	117	101	112	99	108	96	105	96	102	94	97	93	90	88				
5.00	123	104	118	102	114	100	118	102	115	100	111	98	108	98	105	96	99	94	92	90				
10.00	127	107	125	105	123	104	123	105	121	104	119	103	112	102	111	101	104	99	97	95				

