


東芝照明器具配光データシート

| | |
|----|-------------------|
| 名称 | 東芝LED照明器具 |
| 形名 | LEKD1063115NV-LS9 |

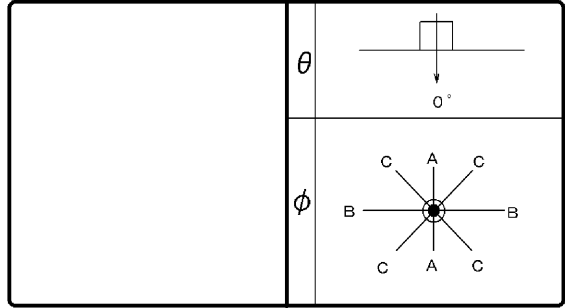

| | | |
|--------|----------|--------|
| 効 率 | F | 0 % |
| | F | 100 % |
| | F | 100 % |
| | 器具 光束 | 700 lm |

| | | |
|-------------|---|------|
| 保 守 率 | 良 | 0.81 |
| | 中 | 0.77 |
| | 否 | 0.68 |

| | |
|-----|---------|
| 前面 | 下面開放 |
| 反射面 | 銀色鏡面仕上げ |

| | |
|--------|--------|
| 最大取付間隔 | |
| A-A | 0.67 H |
| B-B | 0.67 H |

備考

| 光度 (cd/1000lm) | | | |
|-------------------------|------|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0° | 2010 | | |
| 10° | 1841 | | |
| 20° | 1002 | | |
| 30° | 358 | | |
| 40° | 43 | | |
| 50° | 0 | | |
| 60° | 0 | | |
| 70° | 0 | | |
| 80° | 0 | | |
| 90° | 0 | | |
| 100° | 0 | | |
| 110° | 0 | | |
| 120° | 0 | | |
| 130° | 0 | | |
| 140° | 0 | | |
| 150° | 0 | | |
| 160° | 0 | | |
| 170° | 0 | | |
| 180° | 0 | | |

| 反 射 率 (%) | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 30 | | | | | | 20 | | | | | | 0 | | | | | |
|--------------------|-----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|---|--|---|--|--|--|--|--|
| | 壁 | 70 | | 50 | | 30 | | 70 | | 50 | | 30 | | 50 | | 30 | | 30 | | 30 | | 10 | | 0 | | 30 | | 10 | | 0 | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | | | | | | | | |
| 室指数 | | 固有照明率 (×0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 102 | 94 | 95 | 90 | 90 | 88 | 100 | 93 | 94 | 90 | 90 | 88 | 93 | 89 | 89 | 87 | 89 | 87 | 86 | 85 | | | | | | | | | | | | | | | | | |
| 0.80 | 111 | 101 | 105 | 98 | 101 | 96 | 109 | 100 | 104 | 98 | 100 | 96 | 102 | 97 | 99 | 96 | 98 | 95 | 94 | 94 | | | | | | | | | | | | | | | | | |
| 1.00 | 112 | 101 | 106 | 98 | 101 | 96 | 110 | 100 | 105 | 98 | 101 | 96 | 102 | 97 | 99 | 95 | 97 | 95 | 94 | 93 | | | | | | | | | | | | | | | | | |
| 1.25 | 114 | 101 | 107 | 98 | 103 | 96 | 112 | 100 | 106 | 98 | 102 | 96 | 103 | 97 | 100 | 95 | 98 | 95 | 93 | 92 | | | | | | | | | | | | | | | | | |
| 1.50 | 116 | 102 | 110 | 100 | 105 | 98 | 113 | 101 | 108 | 99 | 104 | 97 | 104 | 98 | 101 | 96 | 99 | 96 | 94 | 93 | | | | | | | | | | | | | | | | | |
| 2.00 | 119 | 103 | 113 | 101 | 108 | 99 | 115 | 102 | 111 | 100 | 107 | 98 | 106 | 99 | 103 | 97 | 100 | 96 | 95 | 94 | | | | | | | | | | | | | | | | | |
| 2.50 | 120 | 104 | 115 | 102 | 111 | 100 | 117 | 103 | 113 | 101 | 109 | 100 | 108 | 100 | 105 | 98 | 101 | 97 | 96 | 95 | | | | | | | | | | | | | | | | | |
| 3.00 | 122 | 105 | 117 | 103 | 114 | 101 | 118 | 104 | 115 | 102 | 111 | 101 | 109 | 100 | 107 | 99 | 102 | 98 | 97 | 95 | | | | | | | | | | | | | | | | | |
| 4.00 | 124 | 106 | 121 | 105 | 118 | 103 | 121 | 105 | 118 | 104 | 115 | 103 | 111 | 102 | 109 | 101 | 105 | 100 | 98 | 97 | | | | | | | | | | | | | | | | | |
| 5.00 | 126 | 107 | 123 | 106 | 120 | 105 | 122 | 106 | 120 | 105 | 117 | 104 | 113 | 103 | 111 | 102 | 106 | 101 | 100 | 98 | | | | | | | | | | | | | | | | | |
| 10.00 | 130 | 108 | 128 | 108 | 127 | 108 | 125 | 107 | 124 | 107 | 123 | 107 | 117 | 105 | 116 | 105 | 110 | 103 | 103 | 101 | | | | | | | | | | | | | | | | | |

