


# 東芝ランプ 配光データシート

名称	東芝LED電球ハロゲン形
形名	LDR3L-M-E11 /3
光束	280 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

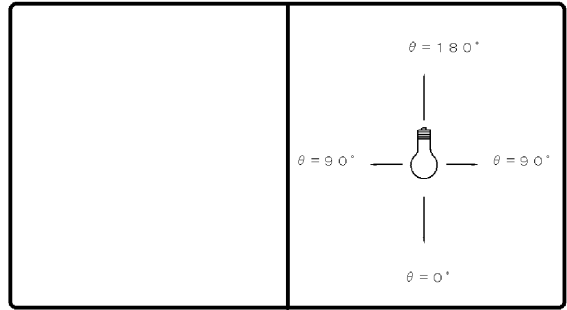

効率	F	%
	F	%
	F	100 %
	器具光束	280 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
0°	7579	25°	87
1°	7565	30°	35
2°	7413	35°	22
3°	7139	40°	16
4°	6749	45°	13
5°	6273	50°	10
6°	5717	55°	9
7°	5112	60°	7
8°	4489	65°	6
9°	3865	70°	5
10°	3261	75°	3
11°	2695	80°	1
12°	2079	85°	0
13°	1744	90°	0
14°	1370		
15°	1060		
16°	814		
17°	623		
18°	477		
19°	370		
20°	289		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	30	10	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		照明率 (×0.01)																						
0.60	95	88	88	84	84	81	94	87	88	84	84	81	86	83	83	81	82	81	79	78				
0.80	101	92	94	88	89	85	99	91	93	88	89	85	91	87	87	85	86	84	83	82				
1.00	105	94	98	90	93	88	103	93	96	90	92	88	94	89	90	87	89	87	85	84				
1.25	107	95	100	91	95	89	104	94	98	91	94	88	95	90	92	88	90	87	85	84				
1.50	108	95	101	92	96	89	106	94	100	91	95	89	96	90	93	88	90	87	86	84				
2.00	111	97	105	94	100	91	108	96	102	93	98	90	98	91	95	89	92	88	86	85				
2.50	114	98	108	95	103	93	110	97	105	94	101	92	100	93	97	91	94	90	88	87				
3.00	116	99	111	97	106	95	112	98	108	96	104	94	102	94	100	93	96	91	90	88				
4.00	119	101	115	99	111	98	115	100	112	98	109	97	106	97	104	96	99	94	93	91				
5.00	121	102	118	101	115	100	117	101	114	100	112	100	108	99	107	98	101	96	95	94				
10.00	126	105	125	105	124	106	121	104	121	104	121	105	114	103	113	103	107	101	101	99				

