


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH84379NW-LD

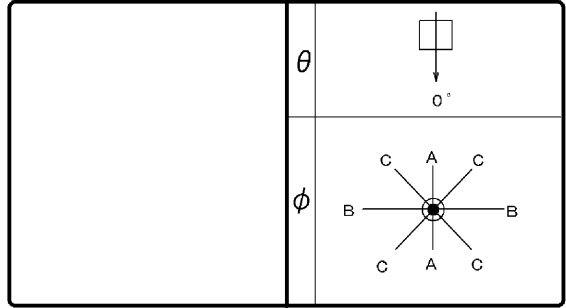

効 率	F	9 %
	F	91 %
	F	100 %
	器具 光束	4400 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
$0^\circ$	277	277	277
$10^\circ$	274	274	274
$20^\circ$	263	263	263
$30^\circ$	243	242	243
$40^\circ$	215	214	215
$50^\circ$	180	180	181
$60^\circ$	140	140	141
$70^\circ$	97	98	99
$80^\circ$	57	58	59
$90^\circ$	29	30	30
$100^\circ$	16	17	17
$110^\circ$	13	13	13
$120^\circ$	12	13	13
$130^\circ$	12	12	13
$140^\circ$	13	13	13
$150^\circ$	12	12	12
$160^\circ$	12	12	12
$170^\circ$	12	13	13
$180^\circ$	13	13	13

反 射 率 (%)	天井	80						70						50						30		20		0					
	壁	70		50		30		70		50		30		50		30		30		10		0		0		0		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数		固有照明率 (×0.01)																											
0.60		59	54	45	42	36	35	57	53	44	41	35	34	41	40	34	33	33	32	27	25								
0.80		71	64	56	53	47	45	68	62	55	51	46	44	52	49	44	43	42	41	36	34								
1.00		78	70	64	59	54	51	75	68	62	58	53	50	58	55	50	48	48	47	42	39								
1.25		86	76	72	66	62	58	82	74	69	64	60	57	65	61	57	55	55	53	48	45								
1.50		91	80	77	70	68	63	86	77	75	69	66	62	70	65	63	60	59	57	52	49								
2.00		99	86	87	78	78	71	94	83	84	76	76	70	78	73	72	68	68	65	60	57								
2.50		104	89	93	82	85	77	99	87	90	81	82	75	83	77	77	72	72	69	65	62								
3.00		107	92	98	86	90	81	102	89	94	84	87	79	87	80	82	76	76	73	69	65								
4.00		112	95	104	90	98	86	107	93	100	88	94	84	92	84	88	81	82	78	74	70								
5.00		115	97	108	93	103	89	110	95	104	91	99	88	95	87	91	84	85	81	77	73								
10.00		121	101	118	99	114	97	116	99	112	97	109	95	103	93	100	91	93	87	84	81								

