


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH80379NL-LD

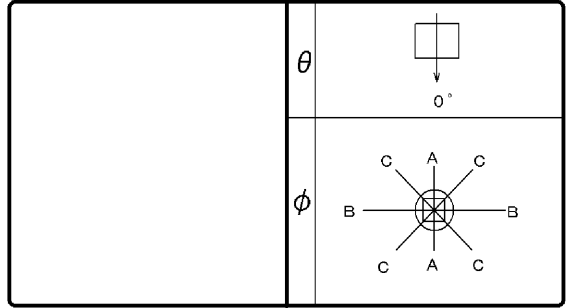

効 率	F	9 %
	F	91 %
	F	100 %
	器具 光束	3000 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	275	275	275
10°	272	272	272
20°	260	261	262
30°	240	242	242
40°	213	215	215
50°	178	180	181
60°	138	141	142
70°	96	100	100
80°	57	60	60
90°	28	31	31
100°	16	17	17
110°	14	13	13
120°	13	12	13
130°	12	12	12
140°	13	12	13
150°	12	12	12
160°	12	12	12
170°	12	12	12
180°	13	13	13

反射 率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																							
0.60	59	54	45	42	36	35	57	53	43	41	35	34	41	39	34	33	33	32	27	25				
0.80	71	64	56	53	47	45	68	62	54	51	46	44	51	49	44	42	42	41	36	34				
1.00	78	70	63	59	54	51	74	68	61	57	52	50	58	55	50	48	48	47	42	39				
1.25	85	76	72	66	62	58	82	73	69	64	60	57	65	61	57	55	54	53	48	45				
1.50	90	80	77	70	68	63	86	77	75	69	66	62	70	65	62	59	59	57	52	49				
2.00	99	86	87	78	78	71	94	83	84	76	76	70	78	73	71	67	67	65	60	57				
2.50	103	89	93	82	85	76	99	87	90	80	82	75	83	77	77	72	72	69	65	61				
3.00	107	92	98	86	90	80	102	89	94	84	87	79	87	80	81	76	76	73	69	65				
4.00	112	95	104	90	98	86	107	93	100	88	94	84	92	84	87	81	82	78	74	70				
5.00	115	97	108	93	103	89	109	95	104	91	99	87	95	87	91	84	85	81	77	73				
10.00	121	101	117	99	114	97	115	99	112	97	109	95	103	93	100	91	92	87	84	81				

