


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH80382NW-LD

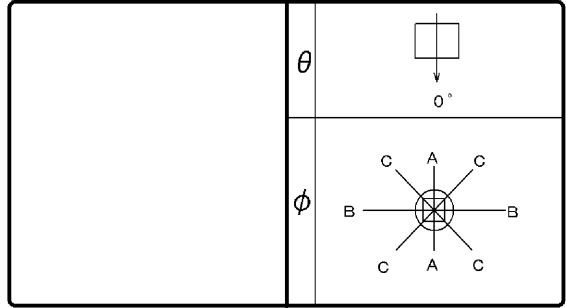

効 率	F ◡	9 %
	F ◒	91 %
	F ○	100 %
	器具 光束	3000 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	284	284	284
10°	280	279	280
20°	268	267	267
30°	247	245	246
40°	219	216	218
50°	183	180	181
60°	141	138	140
70°	99	96	98
80°	60	58	59
90°	32	31	31
100°	16	15	16
110°	10	10	10
120°	9	10	10
130°	11	11	11
140°	11	12	12
150°	12	12	12
160°	12	13	12
170°	14	15	15
180°	15	16	15

反射 率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																							
0.60	59	55	45	43	36	35	57	53	44	42	36	35	42	40	34	33	33	32	28	26				
0.80	71	65	56	53	47	45	68	62	55	52	46	44	52	50	44	43	43	42	37	34				
1.00	78	70	64	59	54	51	75	68	62	58	53	50	58	55	51	49	48	47	42	40				
1.25	86	76	72	66	62	58	82	74	70	64	61	57	65	62	58	55	55	53	48	46				
1.50	91	80	78	71	68	63	87	78	75	69	66	62	70	66	63	60	60	58	53	50				
2.00	99	86	88	78	79	72	95	84	84	76	76	70	79	73	72	68	68	65	61	58				
2.50	104	90	94	83	85	77	99	87	90	81	82	75	84	77	77	73	73	70	65	62				
3.00	107	92	98	86	91	81	103	90	94	84	87	79	87	80	82	76	77	73	69	66				
4.00	112	95	105	91	98	86	107	93	100	89	94	84	93	85	88	81	82	78	74	71				
5.00	115	97	109	93	103	89	110	95	104	91	99	88	96	87	92	84	85	81	78	74				
10.00	121	102	118	99	114	97	116	99	112	97	109	95	103	93	101	91	93	88	85	81				

