


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH81382NL-LD

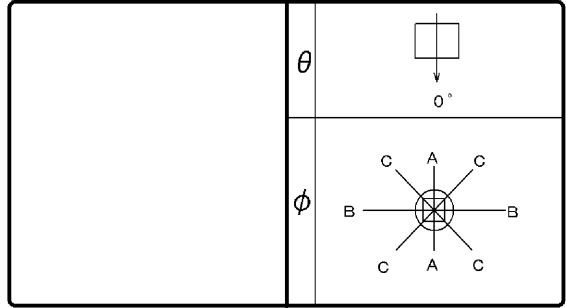

効 率	F ◡	8 %
	F ◡	92 %
	F ○	100 %
	器具 光束	3800 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	278	278	278
10°	275	275	275
20°	261	264	263
30°	241	246	244
40°	212	219	217
50°	177	185	182
60°	137	145	142
70°	95	102	100
80°	58	64	61
90°	30	34	33
100°	15	17	16
110°	10	10	10
120°	9	9	9
130°	11	10	10
140°	11	11	11
150°	12	12	12
160°	12	12	12
170°	14	14	14
180°	15	15	15

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																							
0.60		59	54	45	42	36	35	57	53	43	41	35	34	41	40	34	33	33	32	28	25				
0.80		71	64	56	53	47	45	68	62	55	51	46	44	52	49	44	43	42	41	36	34				
1.00		78	70	63	59	54	51	75	68	62	58	53	50	58	55	50	48	48	47	42	39				
1.25		86	76	72	66	62	58	82	74	69	64	60	57	65	61	57	55	55	53	48	45				
1.50		91	80	77	70	68	63	87	77	75	69	66	62	70	66	63	60	60	58	53	50				
2.00		99	86	87	78	78	71	94	84	84	76	76	70	78	73	72	68	68	65	60	57				
2.50		104	89	93	82	85	76	99	87	90	81	82	75	83	77	77	72	73	70	65	62				
3.00		107	92	98	86	90	80	102	90	94	84	87	79	87	80	82	76	77	73	69	66				
4.00		112	95	104	90	98	86	107	93	100	88	94	84	92	85	88	81	82	78	74	71				
5.00		115	97	108	93	103	89	110	95	104	91	99	88	96	87	92	84	85	81	77	74				
10.00		121	101	118	99	114	97	116	99	112	97	109	95	103	93	101	91	93	88	85	81				

