

# 東芝照明器具配光データシート


名称	LED街路灯
形名	LEDG-15822N (K)

保守率	良	0.78
	中	0.76
	否	0.72



光源	名称	LEDランプ
	形名	—
	光束	13000 lm × 1

効率	F 	0.0 %
	F 	100 %
	F 	100 %
	器具光束	13000 lm

前面	ガラス (クリアー)
反射面	

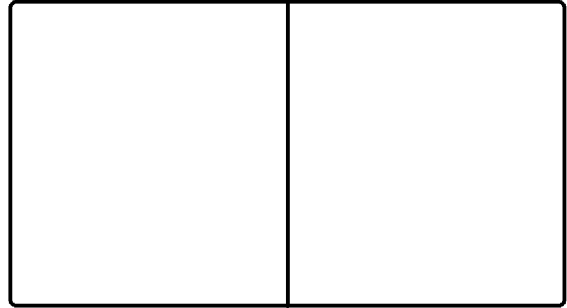

備考

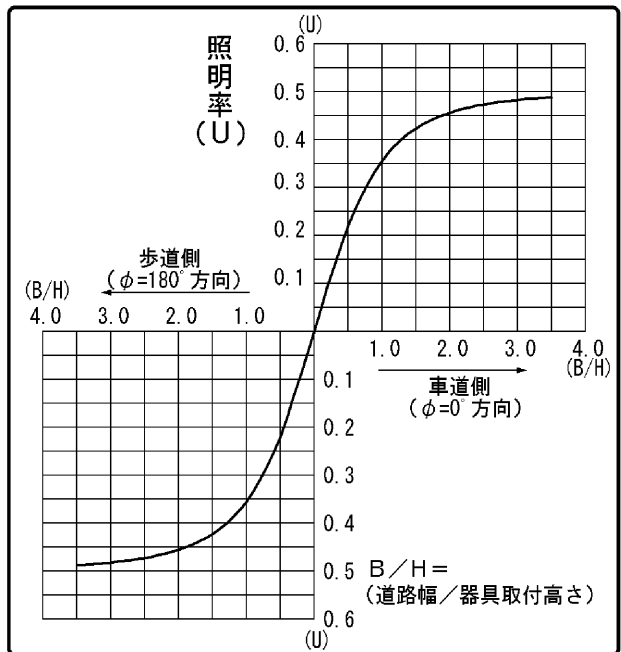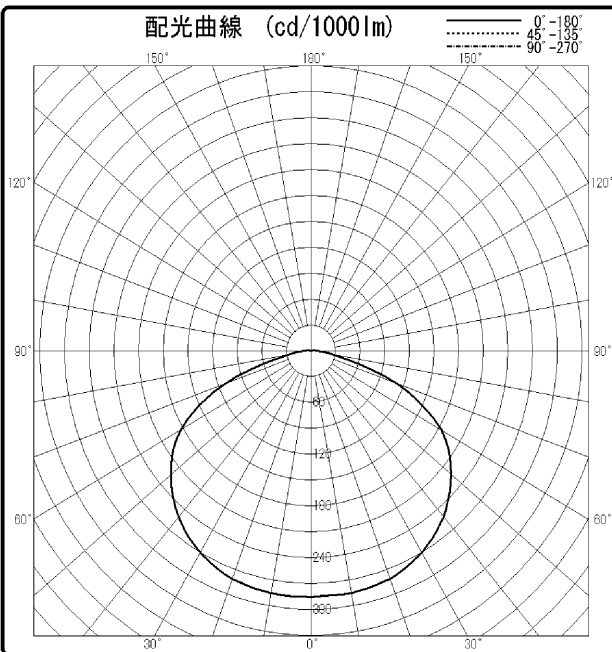

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	285				
10°	285				
20°	281				
30°	270				
40°	251				
50°	223				
60°	183				
70°	112				
80°	31				
90°	0				
100°	0				
110°	0				
120°	0				
130°	0				
140°	0				
150°	0				
160°	0				
170°	0				
180°	0				

