

東芝照明器具配光データシート

名称	LED街路灯
形名	LEDG-15822N (S)



保守率	良	0.78
	中	0.76
	否	0.72

光源	名称	LEDランプ
	形名	—
	光束	13000 lm × 1

効率	F	0.0 %
	F	100 %
	F	100 %
	器具光束	13000 lm

前面	ガラス (クリアー)
反射面	

備考	
----	--

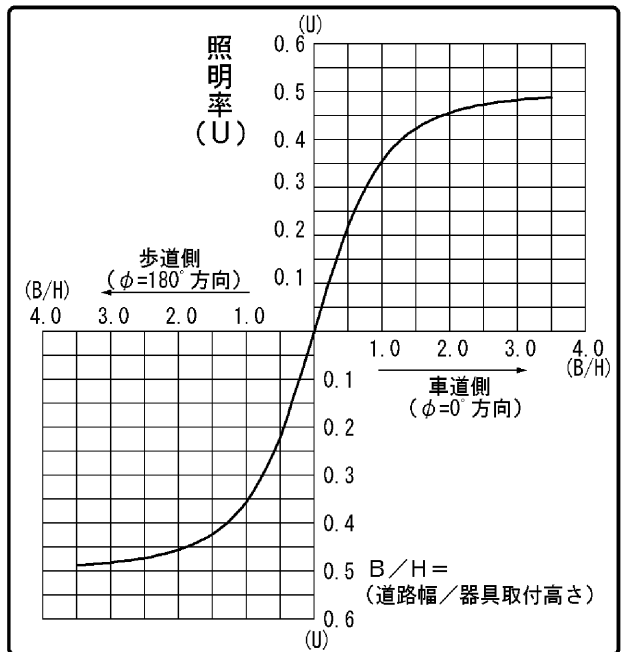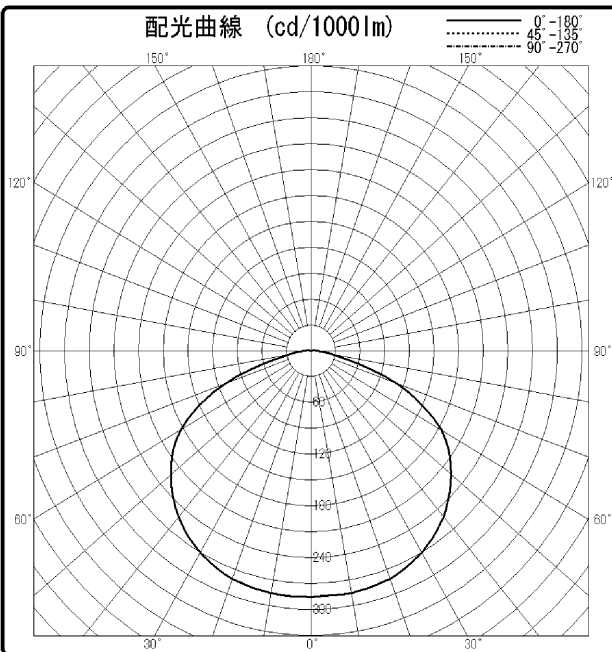

		光度 (cd/1000lm)				
θ	ϕ	0°	45°	90°	135°	180°
0°	0°	285				
10°	0°	285				
20°	0°	281				
30°	0°	270				
40°	0°	251				
50°	0°	223				
60°	0°	183				
70°	0°	112				
80°	0°	31				
90°	0°	0				
100°	0°	0				
110°	0°	0				
120°	0°	0				
130°	0°	0				
140°	0°	0				
150°	0°	0				
160°	0°	0				
170°	0°	0				
180°	0°	0				

