


東芝照明器具配光データシート

名称	
形名	LEDG87945L (S) -LS

保守率	良	0.67
	中	0.63
	否	0.56

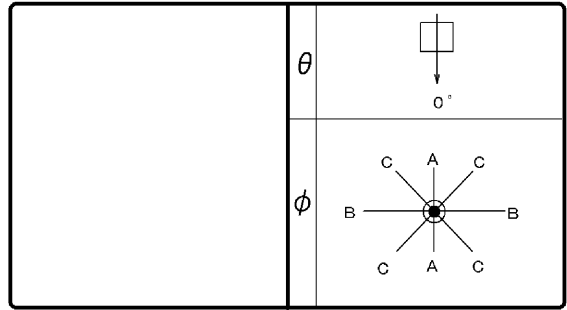

光源	名称	
	形名	-
	光束	415 lm x 1

効率	F	0%
	F	100%
	F	100%
	器具光束	415 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前面	
反射面	

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	521		
10°	517		
20°	493		
30°	452		
40°	362		
50°	125		
60°	47		
70°	35		
80°	11		
90°	0		
100°	0		
110°	0		
120°	0		
130°	1		
140°	1		
150°	1		
160°	1		
170°	2		
180°	2		

反射率 (%)	天井																			
	80				70				50				30		20		0			
壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0	0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数	照明率 (x0.01)																			
0.60	74	68	62	59	54	53	72	67	61	58	54	52	59	57	53	52	53	52	48	47
0.80	87	79	75	70	67	65	85	77	74	70	67	64	72	69	66	64	65	63	60	58
1.00	93	83	82	76	74	70	90	82	80	75	73	70	78	74	72	69	70	68	65	63
1.25	99	88	89	81	81	76	97	87	87	81	80	76	84	79	78	75	76	74	71	69
1.50	104	91	94	85	87	81	101	90	92	84	85	80	88	83	83	79	81	78	75	73
2.00	110	96	102	91	95	87	107	95	100	90	94	86	95	88	90	85	87	84	81	80
2.50	114	98	107	94	101	91	110	97	104	93	98	90	99	91	94	89	91	87	85	83
3.00	117	100	110	96	105	93	113	99	107	95	102	92	102	93	98	91	94	90	87	85
4.00	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	93	90	89
5.00	122	103	117	101	113	99	118	102	114	100	110	98	107	98	104	96	99	94	92	90
10.00	126	105	124	104	121	103	121	104	119	103	117	102	112	101	110	100	104	98	96	94

