


東芝照明器具配光データシート

名称	
形名	LEDG87945L (W) -LS

保守率	良	0.67
	中	0.63
	否	0.56

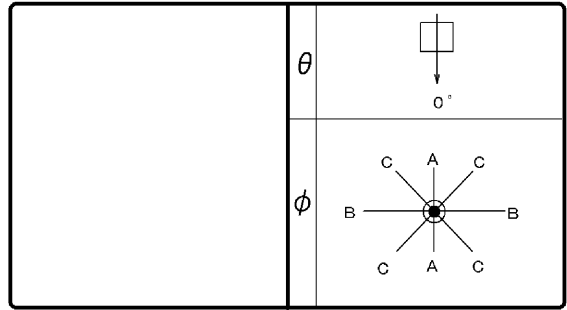

光源	名称	
	形名	—
	光束	500 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	500 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前面	
反射面	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	469		
10°	467		
20°	450		
30°	417		
40°	335		
50°	139		
60°	69		
70°	53		
80°	26		
90°	1		
100°	0		
110°	0		
120°	0		
130°	1		
140°	1		
150°	1		
160°	1		
170°	2		
180°	2		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	71	65	58	55	51	49	69	64	58	55	50	49	56	54	50	48	49	48	44	43																	
0.80	84	76	71	67	63	61	82	75	70	66	63	60	68	65	62	60	61	59	55	54																	
1.00	90	81	78	72	70	66	88	80	77	72	69	66	74	70	68	65	66	65	61	59																	
1.25	97	86	86	79	78	73	94	85	84	78	77	72	81	76	75	71	73	71	67	65																	
1.50	101	89	91	83	83	77	98	88	89	82	82	77	85	80	79	76	77	75	71	69																	
2.00	109	94	99	89	92	84	105	93	97	88	91	84	93	86	87	82	84	81	78	76																	
2.50	112	97	104	92	98	88	109	96	102	91	96	87	97	89	92	86	88	85	82	80																	
3.00	115	99	108	95	102	91	111	97	105	94	100	90	100	92	95	89	91	87	85	83																	
4.00	119	101	113	98	108	95	115	100	110	97	105	94	104	95	100	92	95	91	88	86																	
5.00	121	103	116	100	112	97	117	101	113	99	109	96	106	97	103	95	98	93	91	89																	
10.00	126	105	123	104	121	102	121	104	119	103	117	101	111	100	109	99	103	97	96	93																	

