


# 東芝照明器具配光データシート

名称	
形名	LEDG87945N (K) -LS

保守率	良	0.67
	中	0.63
	否	0.56

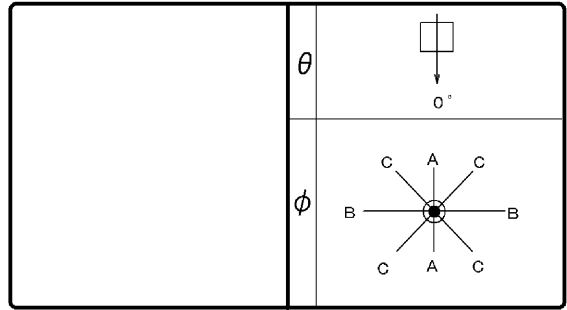

光源	名称	
	形名	—
	光束	345 lm × 1

効率	F ◐	0%
	F ◑	100%
	F ○	100%
	器具光束	345 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

前面	
反射面	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	613		
10°	602		
20°	566		
30°	509		
40°	392		
50°	102		
60°	9		
70°	5		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	1		
140°	1		
150°	1		
160°	1		
170°	2		
180°	2		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	78	72	67	64	60	58	77	71	66	63	60	58	65	62	59	58	59	57	54	53																	
0.80	91	83	81	76	74	71	89	82	80	75	73	71	78	74	72	70	71	70	67	65																	
1.00	97	87	87	81	80	76	95	86	86	80	79	76	83	79	78	75	76	74	72	70																	
1.25	103	92	94	86	87	82	101	91	92	85	86	81	89	84	84	81	82	80	77	76																	
1.50	107	94	99	89	92	86	104	93	97	89	91	85	93	87	88	84	86	83	81	79																	
2.00	113	98	106	95	100	91	110	97	103	94	98	91	99	92	95	90	92	88	86	85																	
2.50	116	100	110	97	105	94	113	99	107	96	102	94	102	94	98	92	95	91	89	87																	
3.00	119	102	113	99	108	96	115	101	110	98	106	96	104	96	101	94	97	93	91	89																	
4.00	122	103	117	101	113	99	118	102	113	100	110	98	107	98	105	97	100	95	93	92																	
5.00	123	104	119	102	116	101	119	103	116	101	112	100	109	99	107	98	101	96	95	93																	
10.00	127	106	124	105	122	104	122	105	120	104	118	103	112	102	111	101	105	99	97	95																	

