


# 東芝照明器具配光データシート

名称	
形名	LEDG87945N (W) -LS

保守率	良	0.67
	中	0.63
	否	0.56

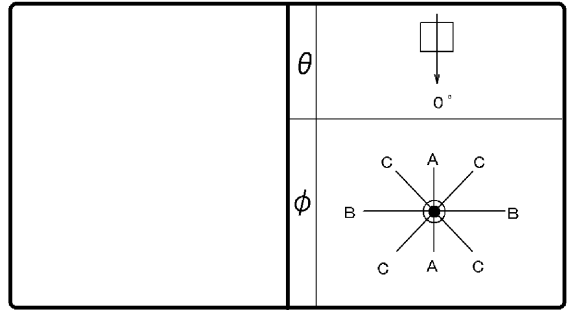

光源	名称	
	形名	-
	光束	500 lm x 1

効率	F	0%
	F	100%
	F	100%
	器具光束	500 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前面	
反射面	

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	523		
10°	519		
20°	495		
30°	454		
40°	364		
50°	125		
60°	47		
70°	35		
80°	11		
90°	0		
100°	0		
110°	0		
120°	0		
130°	1		
140°	1		
150°	1		
160°	1		
170°	2		
180°	2		

反射率 (%)	天井																			
	80				70				50				30		20		0			
壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																			
0.60	74	68	62	59	55	53	72	67	61	58	54	53	60	57	53	52	53	52	48	47
0.80	87	79	75	71	68	65	85	78	74	70	67	65	72	69	66	64	65	63	60	59
1.00	93	84	82	76	74	71	91	82	81	75	74	70	78	74	72	69	71	69	65	64
1.25	100	89	89	82	82	77	97	87	88	81	81	76	84	80	79	75	77	74	71	70
1.50	104	92	94	86	87	81	101	90	92	85	86	80	89	83	83	79	81	78	75	74
2.00	111	96	102	91	96	87	107	95	100	91	94	87	96	89	91	86	88	84	82	80
2.50	114	99	107	94	101	91	111	97	104	94	99	90	99	92	95	89	91	88	85	83
3.00	117	100	110	97	105	94	113	99	107	96	103	93	102	94	98	91	94	90	87	86
4.00	120	102	115	100	110	97	116	101	112	98	108	96	105	96	102	94	97	93	91	89
5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91
10.00	127	106	124	105	122	103	122	105	120	103	118	102	112	101	110	100	104	98	97	95

