

東芝照明器具配光データシート


名称	LED処置灯
形名	LEDD-09313M L-LD9

光源	名称	LED
	形名	3000K
	光束	1320 lm × 1

前面	カバー (フロスト)
反射面	塗装 (白)

保守率	良	0.76
	中	0.72
	否	0.68

効率	F ◡	0%
	F ◐	100%
	F ○	100%
	器具光束	1320 lm

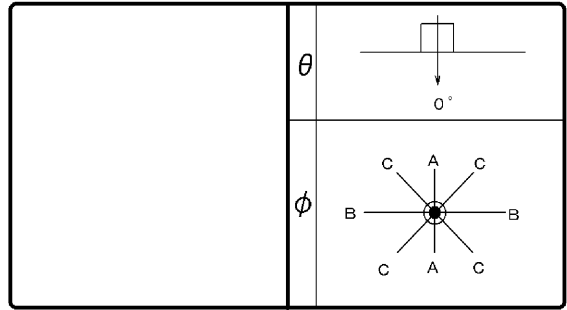

最大取付間隔		備考
A-A	1.0 H	
B-B	1.0 H	

0°	730	25°	497
1°		30°	408
2°		35°	324
3°		40°	251
4°		45°	193
5°	742	50°	149
6°		55°	110
7°		60°	76
8°		65°	47
9°		70°	25
10°	715	75°	10
11°		80°	6
12°		85°	4
13°		90°	0
14°			
15°	663		
16°			
17°			
18°			
19°			
20°	586		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	77	71	65	62	58	57	75	70	65	62	58	56	63	61	57	56	57	56	52	51
0.80	89	81	78	73	71	68	87	80	77	73	70	68	75	72	69	67	68	67	64	62
1.00	95	85	84	78	77	73	93	84	83	77	76	73	80	76	75	72	73	71	68	67
1.25	101	90	91	83	83	78	98	88	89	82	82	78	86	81	80	77	78	76	73	71
1.50	105	93	95	87	88	82	102	91	94	86	87	82	90	84	85	81	82	80	77	75
2.00	111	97	103	92	97	88	108	96	101	91	95	88	96	90	92	86	89	85	83	81
2.50	115	99	108	95	102	92	111	98	105	94	100	91	100	92	96	90	92	88	86	84
3.00	118	101	111	97	106	94	114	100	108	96	103	94	103	94	99	92	95	91	88	87
4.00	121	103	116	100	111	98	117	102	112	99	108	97	106	97	103	95	98	94	92	90
5.00	123	104	119	102	115	100	119	103	115	101	112	99	108	99	106	97	101	96	94	92
10.00	127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	99	98	96

