


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEKR760125BCN-LC9

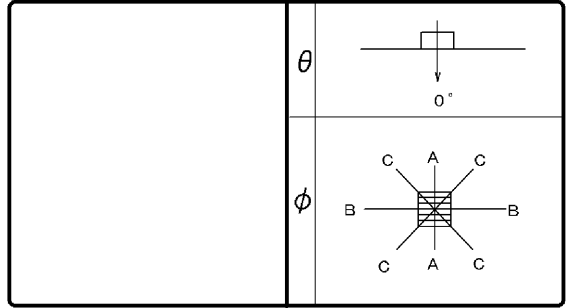

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	4740 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備 考	青色/3600K~4400K時

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	386	386	386
10°	377	376	376
20°	353	348	350
30°	317	306	310
40°	271	255	261
50°	215	197	204
60°	156	137	143
70°	98	78	85
80°	47	26	27
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																							
0.60		64	59	50	48	42	40	62	58	49	47	41	40	48	46	41	40	40	39	35	33				
0.80		77	69	63	59	54	51	74	68	62	58	53	51	59	57	52	51	51	50	45	44				
1.00		84	75	70	65	61	58	81	74	69	64	60	57	66	63	59	57	57	56	51	50				
1.25		91	81	78	72	69	65	88	80	77	71	68	64	74	69	66	64	64	63	58	56				
1.50		96	85	84	76	75	70	93	83	82	75	74	69	79	74	72	68	70	67	63	61				
2.00		104	91	94	84	86	78	101	89	92	83	84	78	87	81	81	76	78	75	71	69				
2.50		109	94	100	88	92	83	105	93	97	87	90	82	92	85	86	81	83	80	76	74				
3.00		112	96	104	91	97	87	109	95	101	90	95	86	96	88	91	85	87	83	80	78				
4.00		117	99	110	95	105	92	113	98	107	94	102	91	101	92	97	89	92	88	85	83				
5.00		120	101	114	98	109	95	115	100	110	97	106	94	104	95	100	92	95	90	88	86				
10.00		125	105	122	103	119	101	121	103	118	102	115	100	110	100	108	98	102	96	95	93				

