


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDU-05304W V-RD1

保守率	良	0.86
	中	0.81
	否	0.72

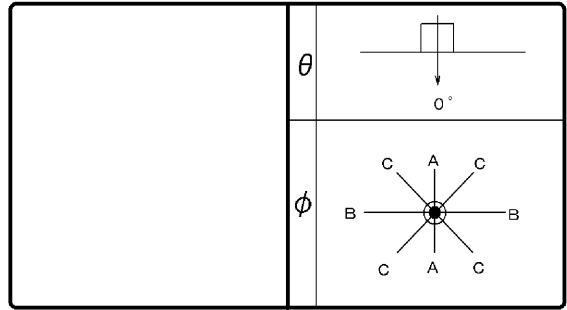

光源	名称	
	形名	LED
	光束	210 lm x 1

効率	F	0%
	F	100%
	F	100%
	器具光束	210 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考	
----	--

前面	
反射面	鏡面処理

0°	8863	25°	183
1°		30°	48
2°		35°	18
3°		40°	8
4°		45°	3
5°	7167	50°	2
6°		55°	1
7°		60°	0
8°		65°	0
9°		70°	0
10°	3335	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	1191		
16°			
17°			
18°			
19°			
20°	326		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	0	0	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0		
室指数	照明率 (x0.01)																			
0.60	115	106	111	105	108	105	114	106	110	105	107	104	109	105	107	104	106	104	104	103
0.80	121	110	117	110	115	110	120	110	117	110	114	110	115	110	113	110	112	109	109	109
1.00	120	108	115	107	112	106	118	107	114	107	111	106	112	106	109	106	108	105	105	104
1.25	119	105	113	104	110	103	116	105	112	104	109	103	109	103	106	102	104	101	101	100
1.50	119	105	114	104	110	103	117	105	112	103	109	102	109	102	106	101	104	101	100	99
2.00	120	105	115	103	111	102	117	104	113	102	109	101	109	101	106	100	103	99	98	97
2.50	122	105	117	104	113	102	119	104	115	103	111	102	110	101	107	100	104	99	98	97
3.00	123	106	119	104	116	103	120	105	116	104	113	102	111	102	109	101	104	100	99	97
4.00	126	107	123	106	120	106	122	106	119	105	117	105	113	104	112	103	107	102	101	99
5.00	128	108	125	108	123	107	124	107	122	107	120	106	115	105	114	105	109	103	103	101
10.00	132	110	132	111	131	112	127	109	127	110	127	111	120	108	120	109	113	107	107	105

