


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA4L-G-K/4 OW/2
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

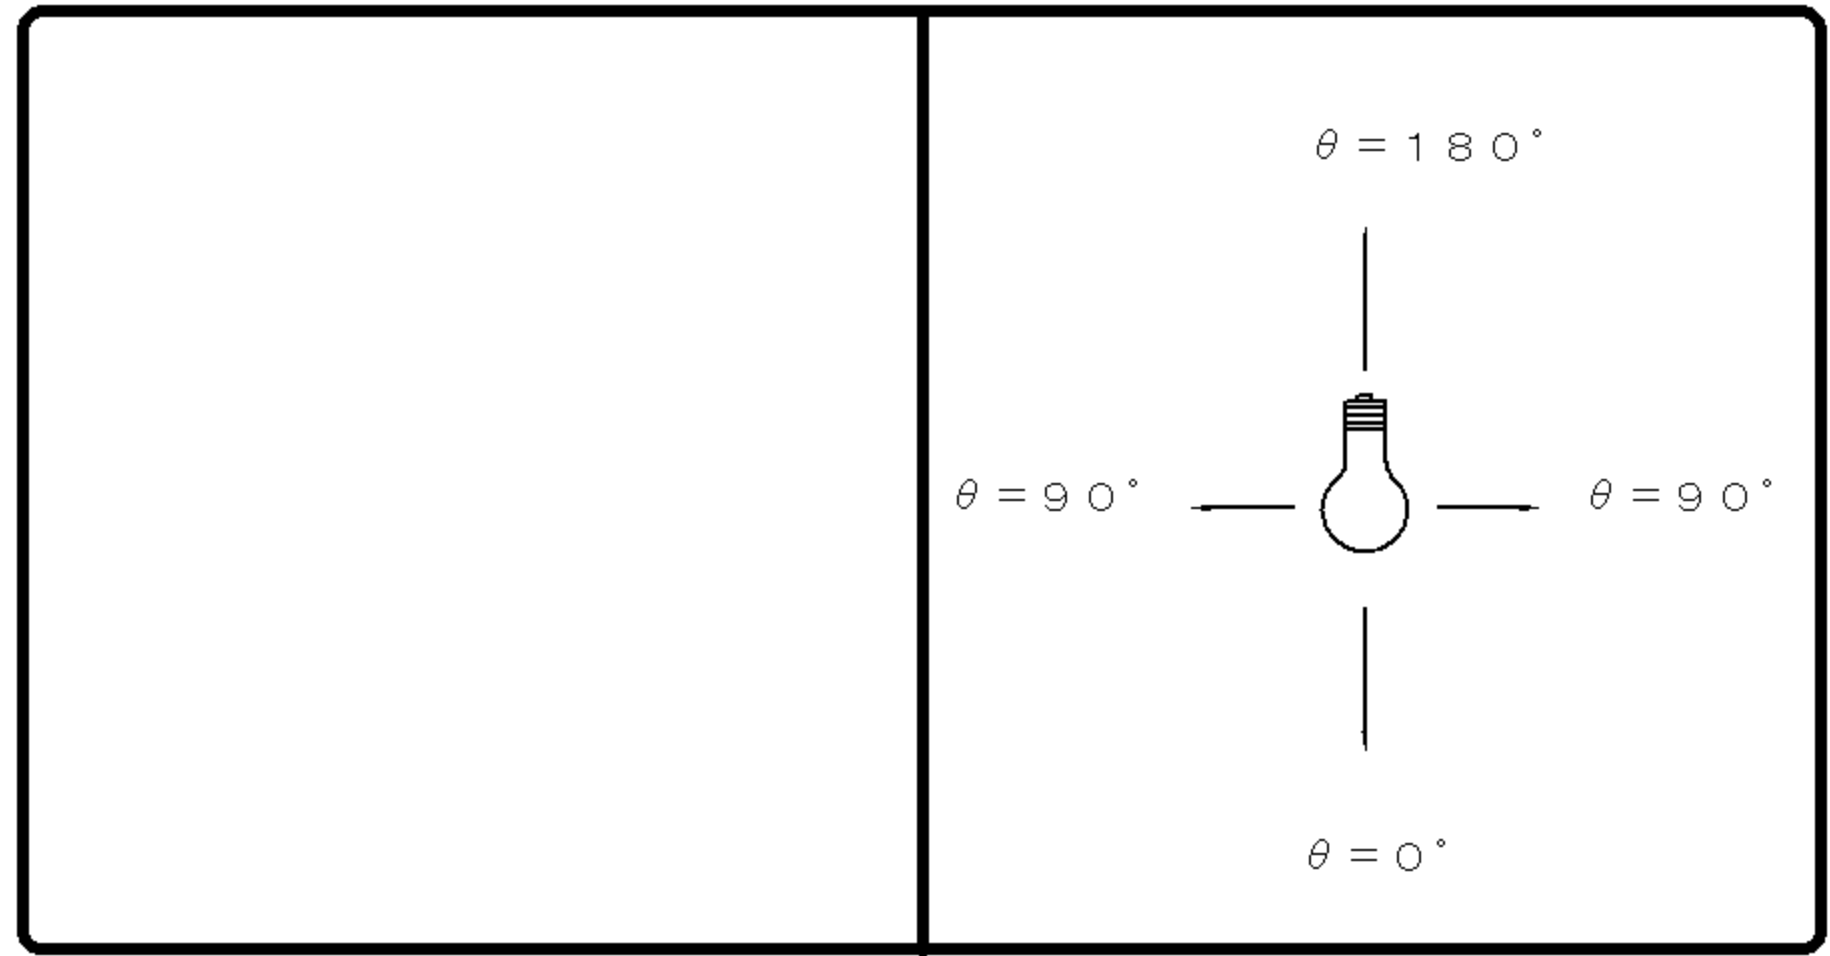

効 率	F	%
	F	%
	F	100 %
	器具 光束	485 lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	128		
10°	128		
20°	127		
30°	126		
40°	123		
50°	118		
60°	111		
70°	103		
80°	93		
90°	83		
100°	72		
110°	62		
120°	51		
130°	41		
140°	32		
150°	25		
160°	16		
170°	5		
180°	1		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																								
0.60	52	47	37	35	28	27	48	44	35	33	27	26	31	29	24	23	21	21	16	12					
0.80	62	56	47	44	37	35	57	53	44	41	35	33	39	37	31	30	28	27	21	18					
1.00	69	62	53	50	43	41	64	58	50	47	41	39	44	42	36	35	32	31	25	21					
1.25	76	67	61	56	51	47	70	63	57	53	48	45	50	47	42	41	37	36	30	25					
1.50	81	71	67	60	56	52	75	67	62	57	53	50	54	51	47	45	41	40	34	28					
2.00	89	77	76	68	66	60	82	73	71	64	62	57	62	57	55	52	48	46	40	34					
2.50	94	81	82	73	73	65	87	76	77	69	68	62	66	61	60	56	52	50	44	38					
3.00	98	84	87	76	78	70	90	79	81	72	73	66	70	65	64	60	56	53	47	41					
4.00	103	87	94	81	86	75	95	83	87	77	80	72	75	69	70	65	61	58	52	45					
5.00	106	90	98	84	91	79	98	85	91	80	85	75	79	72	74	68	64	61	55	48					
10.00	113	95	108	91	104	88	105	90	101	87	97	84	87	78	84	76	72	68	63	55					

