


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD87040WWKLS

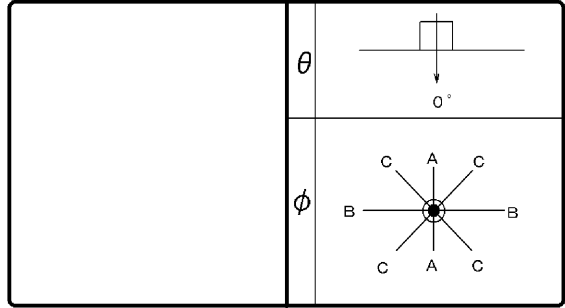

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	510 lm

保 守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	366		
10°	358		
20°	338		
30°	307		
40°	265		
50°	215		
60°	158		
70°	93		
80°	13		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	固有照明率 (×0.01)																																				
0.60	63	58	49	47	41	40	62	57	49	46	41	39	47	45	40	39	39	38	34	32																	
0.80	76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	45	43																	
1.00	83	75	70	65	61	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49																	
1.25	91	81	78	72	69	65	88	79	77	71	68	64	73	69	66	63	64	62	58	56																	
1.50	96	85	84	76	75	70	93	83	82	75	74	69	79	74	72	68	70	67	63	61																	
2.00	105	91	94	84	86	79	101	89	92	83	84	78	87	81	81	77	78	75	72	70																	
2.50	109	94	100	88	93	84	105	93	97	87	91	83	92	85	87	81	83	80	77	75																	
3.00	113	97	105	92	98	87	109	95	102	91	96	87	96	88	91	85	87	84	80	78																	
4.00	117	100	111	96	105	92	113	98	107	95	102	91	101	93	97	90	93	88	85	83																	
5.00	120	101	114	98	110	95	116	100	111	97	106	94	104	95	101	93	96	91	88	86																	
10.00	125	105	122	103	120	102	121	104	118	102	116	101	111	100	109	99	102	97	95	93																	

