


東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-60420WK-LS9

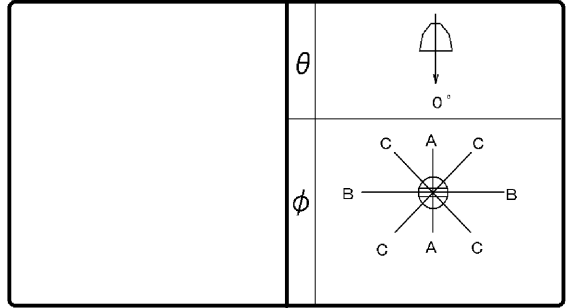

効 率	F	3 %
	F	97 %
	F	100 %
器具 光束		5250 lm

保 守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	プリズム (透明)

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	LEDP-60423W-LS9+LEDX-95010
----	----------------------------

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	830		
10°	673		
20°	593		
30°	534		
40°	166		
50°	96		
60°	56		
70°	32		
80°	17		
90°	10		
100°	6		
110°	3		
120°	8		
130°	7		
140°	2		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井			70			50			30			20			0				
	壁	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	
室指数	固有照明率 (×0.01)																			
0.60	78	72	67	64	61	59	77	71	66	63	60	58	65	62	59	58	58	57	54	53
0.80	90	82	79	75	73	70	88	81	78	74	72	69	76	73	70	68	69	68	65	63
1.00	95	85	85	79	78	74	93	84	83	78	77	73	80	76	75	72	73	71	68	67
1.25	101	89	91	83	84	78	98	88	89	82	82	78	85	80	80	77	78	76	72	71
1.50	104	92	95	86	88	82	101	91	93	85	87	81	89	83	84	80	81	79	76	74
2.00	110	96	102	91	96	87	107	94	100	90	94	87	95	88	90	85	87	83	81	79
2.50	114	98	106	94	100	90	110	96	103	93	98	90	98	91	94	88	90	86	83	81
3.00	116	100	110	96	104	93	112	98	106	95	101	92	100	92	97	90	92	88	86	83
4.00	119	102	114	99	109	96	115	100	110	97	106	95	104	95	101	93	95	91	89	86
5.00	121	103	117	100	113	98	117	101	113	99	109	97	106	96	103	95	98	93	90	88
10.00	126	105	123	104	121	103	121	104	119	102	117	101	110	100	109	99	102	96	95	92

