


東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-60421WK-LS9

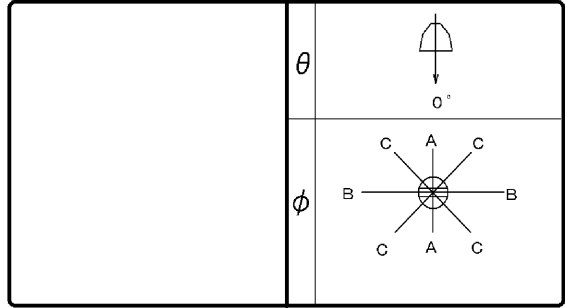

効 率	F ◡	19 %
	F ◒	81 %
	F ○	100 %
器具 光束		5250 lm

保守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	プリズム (乳白)

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	LEDP-60423W-LS9+LEDX-95011
----	----------------------------

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	725		
10°	593		
20°	539		
30°	460		
40°	70		
50°	48		
60°	46		
70°	40		
80°	34		
90°	32		
100°	33		
110°	33		
120°	32		
130°	31		
140°	29		
150°	23		
160°	20		
170°	17		
180°	0		

反射率 (%)	天井														
	80			70			50			30			20		
壁	70	50	30	70	50	30	50	30	10	50	30	10	30	10	0
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	固有照明率 (×0.01)														
0.60	74	68	63	60	56	55	72	66	62	59	55	54	59	56	53
0.80	85	77	74	69	67	64	82	75	72	68	65	63	68	65	63
1.00	89	80	79	73	71	68	86	78	76	71	70	66	72	68	66
1.25	95	84	84	77	77	72	90	81	81	75	74	70	76	71	70
1.50	98	87	88	80	81	75	94	84	85	78	78	73	79	74	74
2.00	104	90	95	85	88	80	99	87	91	83	85	78	84	78	79
2.50	107	93	99	88	93	84	102	90	95	85	89	81	87	80	83
3.00	110	94	103	90	97	86	104	91	98	87	93	84	89	82	85
4.00	113	96	107	93	102	90	107	93	102	90	98	87	93	85	89
5.00	116	98	110	95	106	92	109	95	105	92	101	90	95	86	92
10.00	121	101	118	99	115	98	114	98	111	96	109	95	100	90	98

