


東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-60421WWK-LS9

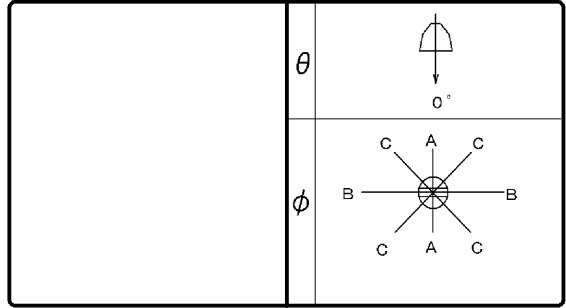

効率	F	19%
	F	81%
	F	100%
器具光束		5210 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	プリズム (乳白)

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	LEDP-60423WW-LS9+LEDX-95011
----	-----------------------------

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	725		
10°	593		
20°	539		
30°	460		
40°	70		
50°	48		
60°	46		
70°	40		
80°	34		
90°	32		
100°	33		
110°	33		
120°	32		
130°	31		
140°	29		
150°	23		
160°	20		
170°	17		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10										
室指数	固有照明率 (×0.01)																																				
0.60	74	68	63	60	56	55	72	66	62	59	55	54	59	56	53	52	51	50	47	45																	
0.80	85	77	74	69	67	64	82	75	72	68	65	63	68	65	63	61	60	59	55	53																	
1.00	89	80	79	73	71	68	86	78	76	71	70	66	72	68	66	64	63	61	58	55																	
1.25	95	84	84	77	77	72	90	81	81	75	74	70	76	71	70	67	67	65	61	58																	
1.50	98	87	88	80	81	75	94	84	85	78	78	73	79	74	74	70	69	67	63	60																	
2.00	104	90	95	85	88	80	99	87	91	83	85	78	84	78	79	75	74	71	67	63																	
2.50	107	93	99	88	93	84	102	90	95	85	89	81	87	80	83	77	76	73	70	65																	
3.00	110	94	103	90	97	86	104	91	98	87	93	84	89	82	85	79	79	75	71	67																	
4.00	113	96	107	93	102	90	107	93	102	90	98	87	93	85	89	83	82	78	74	70																	
5.00	116	98	110	95	106	92	109	95	105	92	101	90	95	86	92	85	84	80	76	71																	
10.00	121	101	118	99	115	98	114	98	111	96	109	95	100	90	98	89	89	84	81	75																	

