


東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-95421WK-LS9

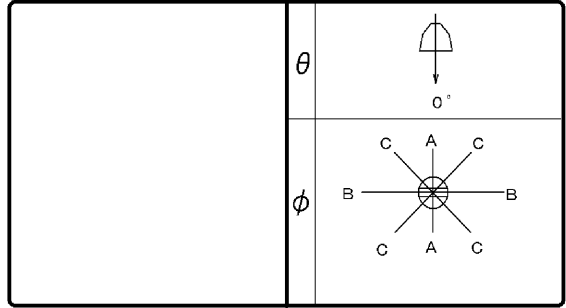

効 率	F ◡	18 %
	F ◡	82 %
	F ○	100 %
	器具光束	9220 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	プリズム (乳白)

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

LEDP-95423W-LS9+LEDX-95011
備考

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	741		
10°	625		
20°	571		
30°	451		
40°	67		
50°	47		
60°	44		
70°	39		
80°	33		
90°	31		
100°	32		
110°	33		
120°	31		
130°	29		
140°	27		
150°	23		
160°	19		
170°	16		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10																		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																			
室指数	固有照明率 (×0.01)																																															
0.60	75	69	64	61	58	56	73	67	63	60	57	55	60	57	55	53	53	52	49	46																												
0.80	86	78	75	70	68	65	82	76	73	69	67	64	69	66	64	62	61	60	57	54																												
1.00	90	81	80	74	72	69	87	79	77	72	71	67	73	69	67	65	64	63	59	56																												
1.25	95	85	85	78	78	73	91	82	82	76	75	71	77	72	71	68	68	66	62	59																												
1.50	99	87	89	81	82	76	94	84	86	79	79	74	80	75	75	71	70	68	64	61																												
2.00	104	91	96	85	89	81	99	88	92	83	86	79	85	79	80	75	75	72	68	64																												
2.50	108	93	100	88	93	84	102	90	95	86	90	82	88	81	83	78	77	74	70	66																												
3.00	110	95	103	90	97	87	105	92	98	88	93	84	90	83	86	80	79	76	72	68																												
4.00	114	97	108	93	103	90	108	94	103	91	98	88	93	85	90	83	83	79	75	71																												
5.00	116	98	111	95	106	93	110	95	105	92	101	90	95	87	93	85	85	80	77	72																												
10.00	121	101	118	99	115	98	114	98	112	96	109	95	101	91	99	90	89	85	81	76																												

