


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA12L-G/10 OW/2
光束	1520 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

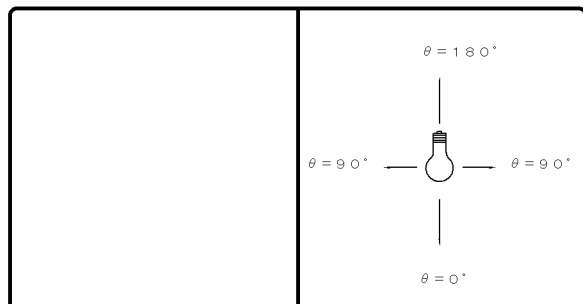

効率	F	%
	F	%
	F	100 %
	器具光束	1520 lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考

光度 (cd/1000lm)			
$\theta$	A-A	B-B	C-C
0°	120		
10°	120		
20°	120		
30°	119		
40°	117		
50°	113		
60°	108		
70°	101		
80°	93		
90°	84		
100°	74		
110°	64		
120°	55		
130°	45		
140°	37		
150°	30		
160°	24		
170°	18		
180°	1		

反射率 (%)	天井						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	照明率 (×0.01)																							
0.60	51	47	37	35	28	27	48	44	34	33	26	25	30	29	23	23	20	20	15	12				
0.80	62	56	46	43	36	35	57	52	43	41	34	33	38	36	30	30	27	26	21	17				
1.00	68	61	53	49	43	41	63	57	50	46	40	38	43	41	36	34	31	30	25	20				
1.25	76	67	61	56	50	47	70	63	57	53	47	45	49	46	42	40	36	35	29	24				
1.50	80	71	66	60	56	52	74	66	62	57	52	49	53	50	46	44	40	39	32	27				
2.00	89	77	76	68	66	60	82	72	71	64	62	57	61	57	54	51	47	45	38	32				
2.50	93	81	82	72	72	65	86	76	76	68	68	62	65	61	59	55	51	49	42	36				
3.00	97	83	87	76	78	69	90	78	80	72	73	66	69	64	63	59	55	52	46	39				
4.00	102	87	93	81	85	75	94	82	87	76	80	71	74	68	69	64	59	57	50	43				
5.00	106	89	98	84	91	79	97	84	91	79	84	75	78	71	73	67	63	60	54	46				
10.00	113	94	108	91	103	88	104	89	100	86	96	83	86	77	83	75	71	67	61	53				

