



# 東芝照明器具配光データシート

非常灯

名称		
形名	LEDEM30280H	M

保守率	0.93
光束換算係数	1.00






光源	平常時	x 1
	非常時	LED x 1
光束	定格	1060 lm
	非常時	1060 lm

前面	グローブ(フロスト)
反射面	

備考	中天井用
----	------

取付高さ	4.0	5.0	6.0	7.0	8.0	-	-	-	-
単体配置	A1	6.2	6.4	6.2	5.7	5.0	-	-	-
	B1	6.2	6.4	6.2	5.7	5.0	-	-	-
直線配置	A2	15.4	16.6	17.4	17.8	17.6	-	-	-
	B2	15.4	16.6	17.4	17.8	17.6	-	-	-
四角配置	A4	13.3	14.7	15.8	16.7	17.4	-	-	-
	B4	13.3	14.7	15.8	16.7	17.4	-	-	-
壁からの最大取付距離	A0	4.3	4.4	4.3	4.0	3.3	-	-	-
	B0	4.3	4.4	4.3	4.0	3.3	-	-	-
	A0	4.3	4.4	4.3	4.0	3.3	-	-	-
	B0	4.3	4.4	4.3	4.0	3.3	-	-	-

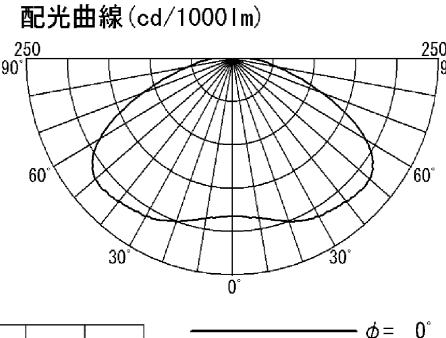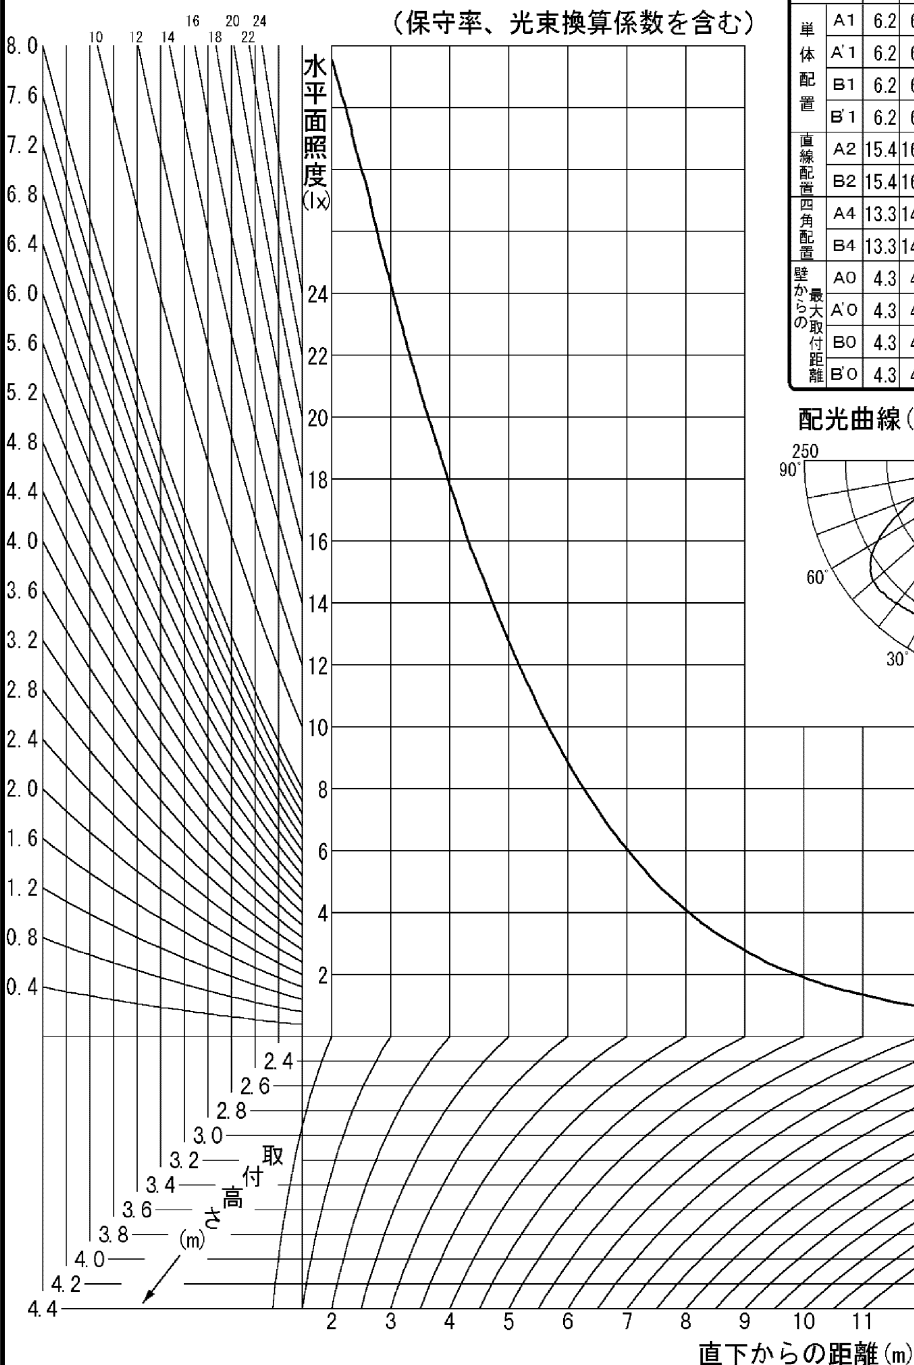

# 東芝照明器具配光データシート

非常灯

名称		保守率	0.93	
形名	LEDEM30280H M	光束換算係数	1.00	
光源	平常時 × 1 非常時 LED × 1	前面	グローブ(フロスト)	
光束	定格 1060 lm 非常時 1060 lm	反射面		備考 中天井用

θ \ φ	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')
0°	182				
10°	187				
20°	200				
30°	210				
40°	215				
50°	217				
60°	186				
70°	116				
80°	55				
90°	26				
100°	13				
110°	9				
120°	9				
130°	10				
140°	10				
150°	8				
160°	5				
170°	3				
180°	2				

取付け高さ (m) \ 照度 (lx)	4.0	5.0	6.0	7.0	8.0	-	-	-	-	-	-	-	-	-
2	0°	6.2	6.4	6.2	5.7	5.0	-	-	-	-	-	-	-	-
	45°													
	90°													
	135°													
	180°													
1	0°	7.8	8.4	8.8	9.0	8.9	-	-	-	-	-	-	-	-
	45°													
	90°													
	135°													
	180°													
0.5	0°	9.5	10.5	11.2	11.9	12.4	-	-	-	-	-	-	-	-
	45°													
	90°													
	135°													
	180°													

# 東芝照明器具配光データシート

非常灯

名称			保守率	0.93	
形名	LEDEM30280H M		光束換算係数	1.00	
光源	平常時	x 1	前面	グローブ(フロスト)	
光束	定格	1060 lm	反射面		備考 中天井用
	非常時	1060 lm			

配置表 (保守率、光束換算係数を含む)


取付高さ	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	
単体配置	A1	4.9	5.0	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.7	5.8	5.8	5.9	5.9	6.0
	A'1	4.9	5.0	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.7	5.8	5.8	5.9	5.9	6.0
	B1	4.9	5.0	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.7	5.8	5.8	5.9	5.9	6.0
	B'1	4.9	5.0	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.7	5.8	5.8	5.9	5.9	6.0
直線配置	A2	11.4	11.6	11.8	12.2	12.4	12.6	12.8	13.0	13.2	13.6	13.8	14.0	14.0	14.2	14.4	14.6
	B2	11.4	11.6	11.8	12.2	12.4	12.6	12.8	13.0	13.2	13.6	13.8	14.0	14.0	14.2	14.4	14.6
四角配置	A4	9.8	10.0	10.2	10.4	10.7	10.9	11.1	11.3	11.5	11.7	11.8	12.0	12.2	12.4	12.5	12.7
	B4	9.8	10.0	10.2	10.4	10.7	10.9	11.1	11.3	11.5	11.7	11.8	12.0	12.2	12.4	12.5	12.7
壁からの最大取付距離	AO	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.1	4.1	4.1	4.1
	A'O	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.1	4.1	4.1	4.1
	BO	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.1	4.1	4.1	4.1
	B'O	3.4	3.4	3.5	3.6	3.6	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.1	4.1	4.1	4.1

取付高さ	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
単体配置	A1	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.3	6.2	6.0	5.7	5.4	5.0
	A'1	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.3	6.2	6.0	5.7	5.4	5.0
	B1	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.3	6.2	6.0	5.7	5.4	5.0
	B'1	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.3	6.2	6.0	5.7	5.4	5.0
直線配置	A2	14.8	15.0	15.2	15.4	15.4	15.6	15.8	15.8	16.0	16.6	17.0	17.4	17.6	17.8	17.8	17.6
	B2	14.8	15.0	15.2	15.4	15.4	15.6	15.8	15.8	16.0	16.6	17.0	17.4	17.6	17.8	17.8	17.6
四角配置	A4	12.9	13.0	13.2	13.3	13.5	13.6	13.8	13.9	14.1	14.7	15.3	15.8	16.3	16.7	17.1	17.4
	B4	12.9	13.0	13.2	13.3	13.5	13.6	13.8	13.9	14.1	14.7	15.3	15.8	16.3	16.7	17.1	17.4
壁からの最大取付距離	AO	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.3	4.4	4.4	4.4	4.3	4.2	4.0	3.7	3.3
	A'O	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.3	4.4	4.4	4.4	4.3	4.2	4.0	3.7	3.3
	BO	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.3	4.4	4.4	4.4	4.3	4.2	4.0	3.7	3.3
	B'O	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.3	4.4	4.4	4.4	4.3	4.2	4.0	3.7	3.3

取付高さ	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単体配置	A1	4.4	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	4.4	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	4.4	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-
	B'1	4.4	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-
直線配置	A2	17.4	17.0	16.4	15.8	15.2	14.4	13.4	12.2	10.4	7.6	-	-	-	-	-
	B2	17.4	17.0	16.4	15.8	15.2	14.4	13.4	12.2	10.4	7.6	-	-	-	-	-
四角配置	A4	17.4	17.0	16.4	15.8	15.2	14.4	13.4	12.2	10.4	7.6	-	-	-	-	-
	B4	17.4	17.0	16.4	15.8	15.2	14.4	13.4	12.2	10.4	7.6	-	-	-	-	-
壁からの最大取付距離	AO	3.2	3.5	3.7	3.5	3.2	3.1	3.2	3.4	4.1	5.4	-	-	-	-	-
	A'O	3.2	3.5	3.7	3.5	3.2	3.1	3.2	3.4	4.1	5.4	-	-	-	-	-
	BO	3.2	3.5	3.7	3.5	3.2	3.1	3.2	3.4	4.1	5.4	-	-	-	-	-
	B'O	3.2	3.5	3.7	3.5	3.2	3.1	3.2	3.4	4.1	5.4	-	-	-	-	-

# 東芝照明器具配光データシート

非常灯

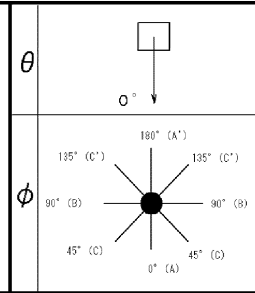名称		保守率	0.93	
形名	LEDEM30280H M	光束換算係数	1.00	
光源	平常時 × 1 非常時 LED × 1	前面 グローブ(フロスト)		
光束	定格 1060 lm 非常時 1060 lm	反射面		備考 中天井用

器具直下からの各方面への指定照度が得られる距離(m) (保守率、光束換算係数を含む)

取付け高さ (m)	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	
2	0°	4.9	5.0	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.6	5.7	5.8	5.8	5.9	5.9	6.0
	45°																
	90°																
	135°																
	180°																
1	0°	5.8	6.0	6.1	6.2	6.3	6.5	6.6	6.7	6.8	6.9	7.0	7.1	7.2	7.3	7.4	7.4
	45°																
	90°																
	135°																
	180°																
0.5	0°	7.0	7.2	7.3	7.4	7.6	7.7	7.9	8.0	8.1	8.3	8.4	8.6	8.7	8.8	8.9	9.0
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
2	0°	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.3	6.2	6.0	5.7	5.4	5.0
	45°																
	90°																
	135°																
	180°																
1	0°	7.6	7.6	7.7	7.8	7.9	7.9	8.0	8.1	8.2	8.4	8.7	8.8	8.9	9.0	9.0	8.9
	45°																
	90°																
	135°																
	180°																
0.5	0°	9.2	9.3	9.4	9.5	9.6	9.7	9.8	9.9	10.0	10.5	10.9	11.2	11.6	11.9	12.1	12.4
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	
2	0°	4.4	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-	
	45°																
	90°																
	135°																
	180°																
1	0°	8.8	8.6	8.4	8.0	7.7	7.3	6.8	6.2	5.4	4.0	-	-	-	-	-	
	45°																
	90°																
	135°																
	180°																
0.5	0°	12.5	12.6	12.7	12.7	12.7	12.7	12.6	12.5	12.2	12.0	11.8	11.5	11.1	10.8	10.4	9.9
	45°																
	90°																
	135°																
	180°																